


ERD ELECTRIC ROD-STYLE ACTUATOR

ENDURANCE TECHNOLOGYSM

PATENT PENDING

ACS
ACTUATOR CONTROL
SOLUTIONS
- STEPPER DRIVE/
CONTROLLER
& MOTORS

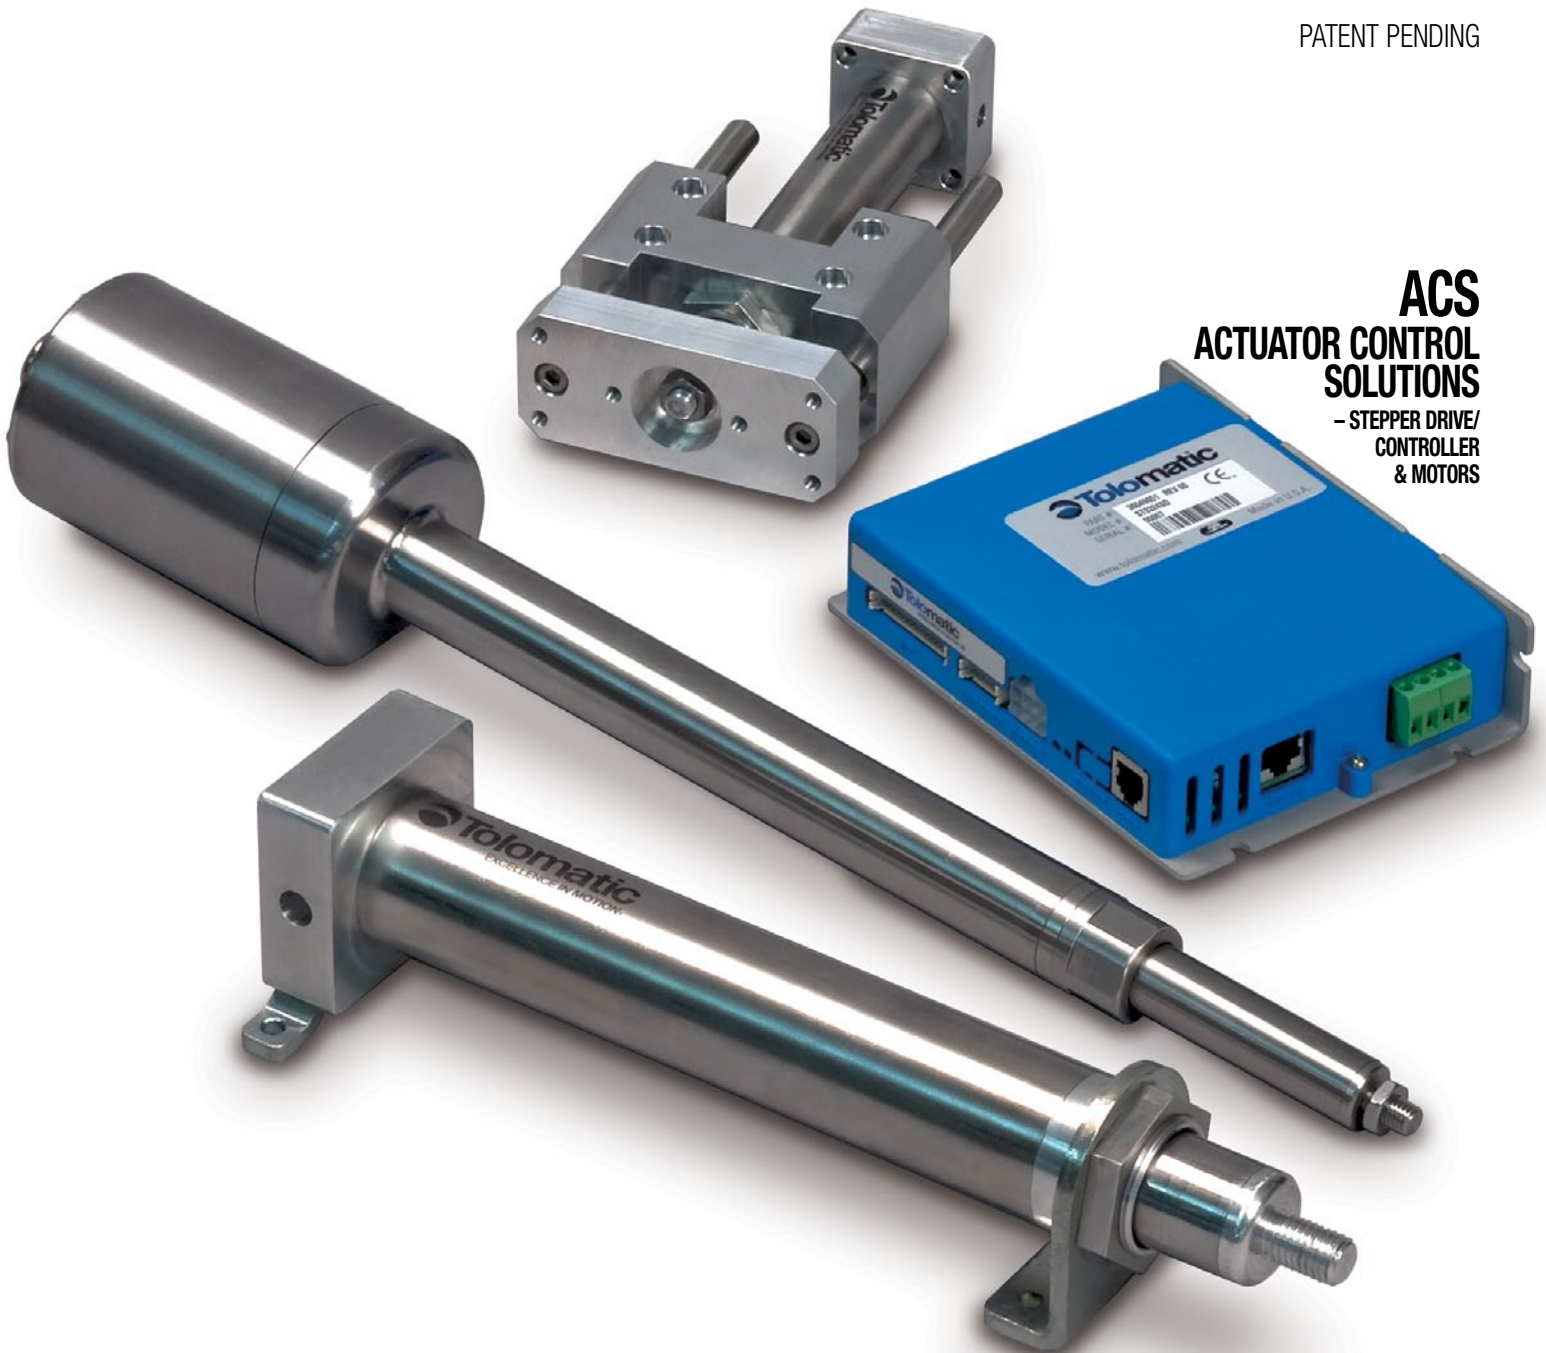

LINEAR SOLUTIONS MADE EASY

ERD – Electric Rod-Style Actuator

WHAT IS THE ERD?

The ERD is an economical rod-style electric actuator designed as an alternate to pneumatic cylinders and an option for automating manual processes. Combined with Tolomatic's ACS stepper drive/controller, an extremely easy-to-use and cost effective actuator control solution is created. The ERD, with two different stainless steel options, is the industry's first ever cataloged all stainless-steel electric actuator family intended for washdown environments.



4 sizes, GD2 Guide Option








Actuator Control Solutions,
Drive & Motor Options



First Ever Catalog All Stainless-Steel Electric Actuators

TOLOMATIC'S ELECTRIC ROD-STYLE ACTUATORS




	ERD	ICR SmartActuator®	RSA	GSA	IMA
					
	Rod-Style Actuator	Integrated Control Rod-Style Actuator	Rod-Style Actuator	Guided Rod-Style Actuator	Integrated Motor Rod-Style Actuator
Thrust up to:	500 lbf [2224 N]	720 lbf [3202.7 N]	7,000 lbf [31,138 N]	2,700 lbf [12,010 N]	3,300 lbf [14,679 N]
Speed up to:	40 in/sec [1016 mm/sec]	25 in/sec [635 mm/sec]	123 in/sec [3,124 mm/sec]	123 in/sec [3,124 mm/sec]	23 in/sec [584 mm/sec]
Stroke Length up to:	24 in [609 mm]	24 in [609 mm]	60 in [1,524 mm]	36 in [914 mm]	18 in [457 mm]
Screw/Nut Type	Solid & Ball	Ball	Solid, Ball & Roller	Solid & Ball	Ball & Roller
<i>For complete information see www.tolomatic.com or literature number:</i>					
Literature Number:	2190-4000	2100-4000	3600-4609	3600-4609	2700-4000


(Not all models deliver maximum values listed, i.e.: Maximum thrust may not be available with maximum speed)

ERD – Applications

Press Fit, Pick & Place, Assembly

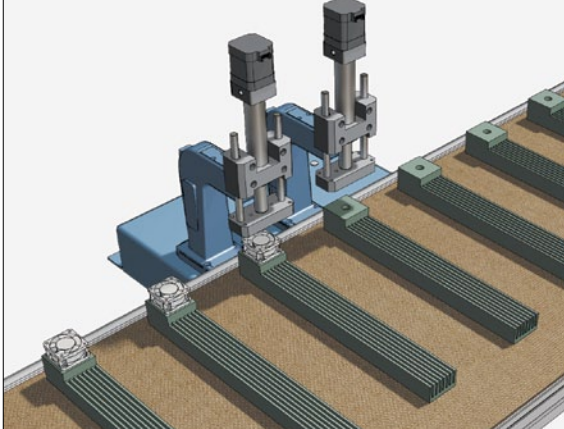

Gating, Sorting, Diverting

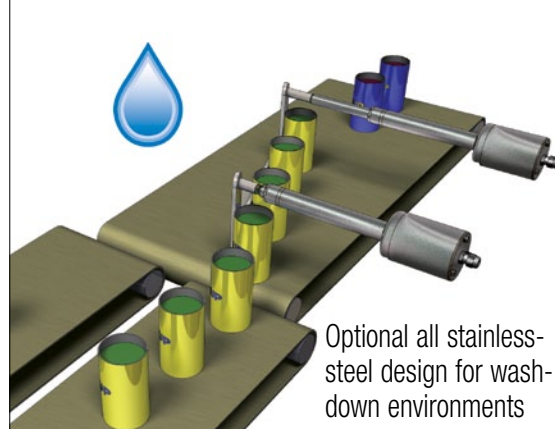

CONTENTS

What is the ERDERD_2

Rod-Style Actuators . . .ERD_2

ApplicationsERD_3

FEATURES

ERDERD_4

ERD SS2ERD_6

ACSERD_8

SPECIFICATIONS

ERDERD_10

MotorsERD_11

ACSERD_11

PERFORMANCE

ERDERD_12

GD2ERD_14

ACS & ERDERD_15

DIMENSIONS

ERDERD_16

IP67 OptionERD_16

FM2, TRR, FFGERD_17

GD2, SS2ERD_18

Tolomatic MotorsERD_19

Alternative Motors . . .ERD_20

ACS DimensionsERD_21

SWITCHESERD_22


Appl. Data Worksheet .ERD_24

Selection Guidelines . .ERD_25


Service PartsERD_26

OrderingERD_27


Aligning

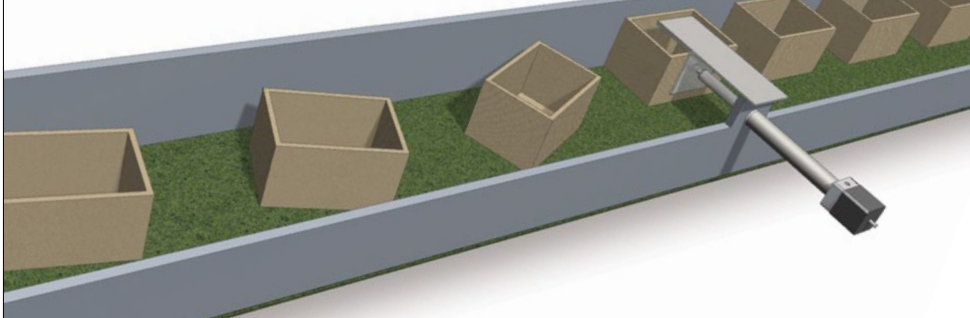

Product Change Over

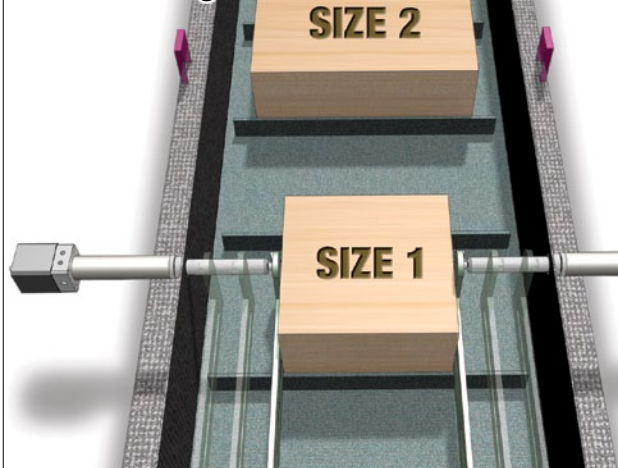

Heat Staking, Sonic Welding

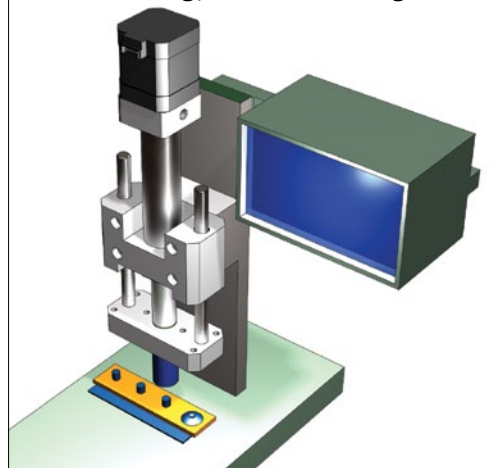

Other Applications:

- Aligning
- Animation
- Assembly
- Automatic tool changers
- Automotive
- Converting
- Conveyors
- Diverting
- Fillers
- Formers
- Gating
- Heat staking
- Laser positioning
- Material handling systems
- Medical equipment
- Motion simulators
- Open/close doors
- Packaging equipment
- Parts clamping
- Patient lifts
- Pick & place
- Plate positioning change
- Press fit
- Product changeover
- Product test simulations
- Robot manipulator arms
- Sonic welding
- Sorting
- Table positioning
- Tension control
- Test stands
- Volumetric pumps
- Web guidance
- Wire winding

ERD – ELECTRIC ROD-STYLE ACTUATOR


ENDURANCE TECHNOLOGYSM

Endurance Technology features are designed for maximum durability to provide extended service life.

The ERD is an economical rod-style electric actuator designed as an alternate to pneumatic cylinders and an option for automating manual processes. The ERD is compatible with many NEMA & metric mount stepper and servo motors to create a flexible, powerful electric actuator solution. Built-to-order in stroke lengths up to 24 inches.

**5 DAYS
BUILT-TO-ORDER**

PATENT PENDING

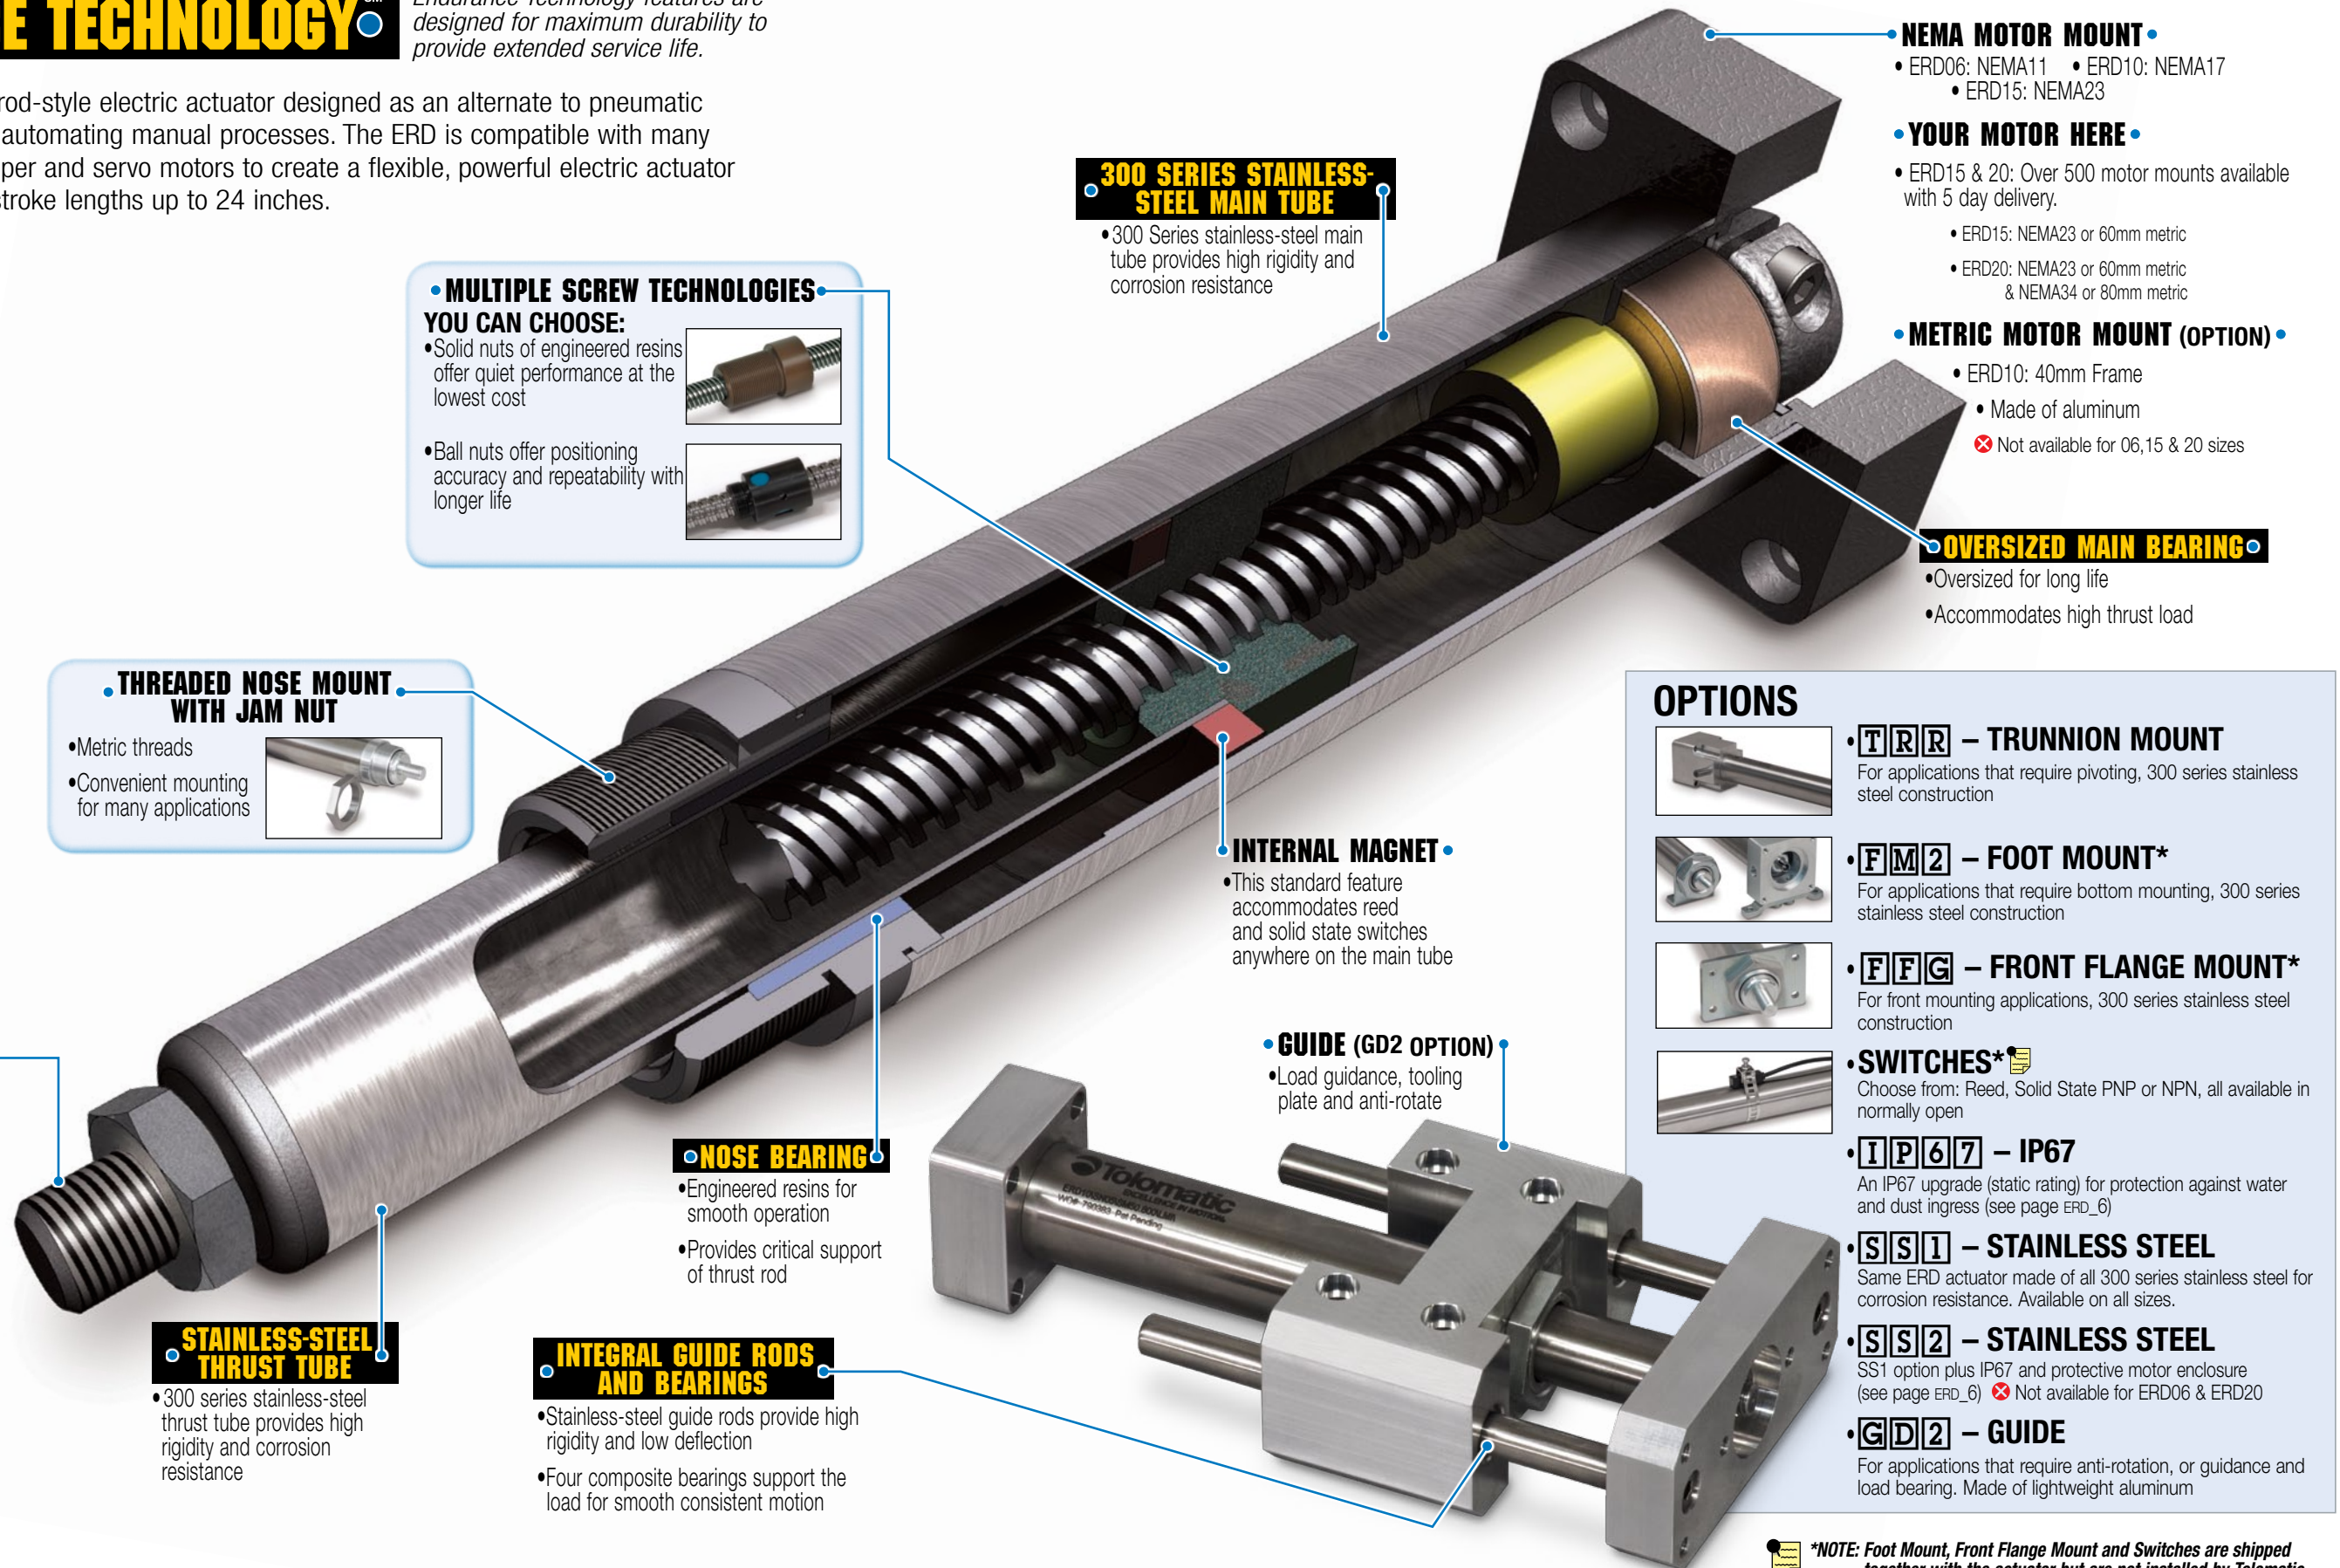

MULTIPLE SCREW TECHNOLOGIES YOU CAN CHOOSE:

- Solid nuts of engineered resins offer quiet performance at the lowest cost
- Ball nuts offer positioning accuracy and repeatability with longer life

300 SERIES STAINLESS-STEEL MAIN TUBE

- 300 Series stainless-steel main tube provides high rigidity and corrosion resistance

- **NEMA MOTOR MOUNT**
 - ERD06: NEMA11
 - ERD10: NEMA17
 - ERD15: NEMA23
- **YOUR MOTOR HERE**
 - ERD15 & 20: Over 500 motor mounts available with 5 day delivery.
 - ERD15: NEMA23 or 60mm metric
 - ERD20: NEMA23 or 60mm metric & NEMA34 or 80mm metric
- **METRIC MOTOR MOUNT (OPTION)**
 - ERD10: 40mm Frame
 - Made of aluminum
 - Not available for 06, 15 & 20 sizes
- **OVERSIZED MAIN BEARING**
 - Oversized for long life
 - Accommodates high thrust load

THREADED NOSE MOUNT WITH JAM NUT

- Metric threads
- Convenient mounting for many applications

INTERNAL MAGNET

- This standard feature accommodates reed and solid state switches anywhere on the main tube

- OPTIONS**
- **TRR – TRUNNION MOUNT**
For applications that require pivoting, 300 series stainless steel construction
 - **FM2 – FOOT MOUNT***
For applications that require bottom mounting, 300 series stainless steel construction
 - **FFC – FRONT FLANGE MOUNT***
For front mounting applications, 300 series stainless steel construction
 - **SWITCHES***
Choose from: Reed, Solid State PNP or NPN, all available in normally open
 - **IP67 – IP67**
An IP67 upgrade (static rating) for protection against water and dust ingress (see page ERD_6)
 - **SS1 – STAINLESS STEEL**
Same ERD actuator made of all 300 series stainless steel for corrosion resistance. Available on all sizes.
 - **SS2 – STAINLESS STEEL**
SS1 option plus IP67 and protective motor enclosure (see page ERD_6) Not available for ERD06 & ERD20
 - **GD2 – GUIDE**
For applications that require anti-rotation, or guidance and load bearing. Made of lightweight aluminum

MALE THREADED ROD END

- Standard metric threads
- Compatible with many commercially available metric rod end accessories

NOSE BEARING

- Engineered resins for smooth operation
- Provides critical support of thrust rod

GUIDE (GD2 OPTION)

- Load guidance, tooling plate and anti-rotate

STAINLESS-STEEL THRUST TUBE

- 300 series stainless-steel thrust tube provides high rigidity and corrosion resistance

INTEGRAL GUIDE RODS AND BEARINGS

- Stainless-steel guide rods provide high rigidity and low deflection
- Four composite bearings support the load for smooth consistent motion

*NOTE: Foot Mount, Front Flange Mount and Switches are shipped together with the actuator but are not installed by Tolomatic.

ERD – ELECTRIC ROD-STYLE ACTUATOR

SS2 ALL 300 SERIES STAINLESS STEEL, IP67, MOTOR PROTECTION

ENDURANCE TECHNOLOGYSM

Endurance Technology features are designed for maximum durability to provide extended service life.

The all 300 series stainless-steel ERD has an IP67 rating (static) that includes a protective enclosure for the standard Tolomatic motor. Built-to-order in stroke lengths up to 24 inches.



• PATENT PENDING •

MULTIPLE SCREW TECHNOLOGIES YOU CAN CHOOSE:

- Solid nuts of engineered resins offer quiet performance at the lowest cost



- Ball nuts offer positioning accuracy and repeatability with longer life



ALL 300 SERIES STAINLESS STEEL CONSTRUCTION

- Corrosion resistant 300 series stainless steel is ideal for washdown environments

VITON® SEALS

- For ingress protection and resistance to chemicals, water and dust
- Used throughout actuator

MALE THREADED ROD END

- Standard metric threads
- Compatible with many commercially available metric rod end accessories

NOSE BEARING

- Engineered resins for smooth operation
- Provides critical support of thrust rod

MOTOR PROTECTION

- Motor enclosure made of 300 series stainless steel designed to protect motor with IP67 rating (static)

*NOTE: Only Tolomatic motors are available with the SS2 option.

FLEXIBLE CONNECTION

- Choice of cord grips or industry standard conduit threads



SS23
1 or 2 cord grips determined if encoder is selected (polymide plastic)



SS21
NPT 1/2" conduit thread &
SS22
M20x1.5 conduit thread

OVERSIZED MAIN BEARING

- Oversized for long life
- Accommodates high thrust load

INTERNAL MAGNET

- This standard feature accommodates reed and solid state switches anywhere on the main tube

OPTIONS




FM2 – FOOT MOUNT*

For applications that require bottom mounting, 300 series stainless steel construction



FFG – FRONT FLANGE MOUNT*

For front mounting applications, 300 series stainless steel construction



SWITCHES*

Choose from: Reed, Solid State PNP or NPN, all available in normally open. (not corrosion resistant)

*NOTE: Foot Mount, Front Flange Mount and Switches are shipped together with the actuator but are not installed by Tolomatic.

IP67 (static rating)

SOLIDS, FIRST DIGIT:	
6	Dust tight No ingress of dust; complete protection against solid object intrusion
LIQUIDS, SECOND DIGIT	
7	Immersion up to 1 m Ingress of water in harmful quantity shall not be possible when the enclosure is immersed in water under defined conditions of pressure and time (up to 1 m of submersion).

(See page ERD_11 for a complete definition of these IP codes)

ACS – Actuator Control Solutions

WHAT IS THE ACS?

The ACS is an extremely easy-to-use stepper drive & controller developed specifically to be used with electric actuators. Simply select the configured Tolomatic actuator in the software to automatically set-up most of the necessary parameters to create motion in the desired linear units (mm or inch).

ACS DRIVE/CONTROLLER (3604-9651) CAPABILITIES:

- 4, 8, or 16 move command modes (absolute, incremental, jog or home with analog output echoing position of actuator from encoder) for infinite positioning capability
- Analog position mode (0-10 Vdc or 4-20 mA)
- Adjustable motion profile parameters (velocity, accel/decel, force). Parameters are independently configurable for each move
- Ability to reduce holding current for energy savings
- End point correction
- Zone output based on position
- Force limiting capability
- Configurable digital I/O (24 Vdc Opto-Isolated)(NPN or PNP)
- Compatible with most 24 Vdc stepper motors

ACS DRIVE/CONTROLLER (3604-9654, 3604-9655) ADDITIONAL CAPABILITIES:

- Ethernet mode provides infinite positioning using EtherNet/IP and Modbus TCP protocols
- Dual Ethernet ports with internal switch for daisy chaining
- Analog output for Analog Position Mode



CAPABILITIES COMING SOON!

OPERATING MODES

- Stepper mode (pulse/direction)
- Pneumatic modes

NETWORKING CAPABILITIES (OPTIONAL)

- Modbus RTU over RS-485

ACS – Actuator Control Solutions

• DUAL ETHERNET PORTS (OPTION)

• Internal switch for daisy chaining up to 255 ACS axes

Protocols:

- EtherNet/IP
- Modbus TCP
- Ethernet TCP/IP



• DUAL PURPOSE HEAT SINK

- Removes heat from drive for optimal performance
- Panel mounting

• DIGITAL I/O

- 8 Digital Inputs
- 4 Digital Outputs
- 24 Vdc Opto-Isolated
- NPN or PNP
- Configurable

• ANALOG I/O

- 0-10 Vdc or 4-20mA
- 1 Analog Input
- 1 Analog Output (Optional)

• FEEDBACK

- For Digital Encoder

• MOTOR POWER

- 24Vdc Stepper Motors

• LED INDICATORS

- Power & Fault indicators

• RS232 COM PORT

- Drive Configuration Port

• POWER CONNECTION

- 24Vdc

• RS485 COM PORT

COMING SOON!

- Modbus RTU



EASY TO USE CONFIGURATION SOFTWARE

• Windows® compliant

Label	Move Type	Position (in)	Velocity (in/sec)	Accel (in/sec ²)	Decel (in/sec ²)	Force %
1	MOVE1	Absolute	1.000	1.00	100.0	100.0
2	MOVE2	Absolute	2.000	2.00	90.0	90.0
3	MOVE3	Absolute	3.000	3.00	80.0	80.0
4	MOVE4	Absolute	4.000	4.00	70.0	70.0
5	IncrPos	0.250	1.00	100.0	100.0	100.0
6	IncrPos	0.500	1.00	100.0	100.0	100.0
7	IncrLeg	0.250	1.00	100.0	100.0	100.0
8	IncrLeg	0.500	1.00	100.0	100.0	100.0
9	FASTJOGPOS	JogPos	0.000	4.00	100.0	100.0
10	SLOWJOGPOS	JogPos	0.000	1.00	100.0	100.0
11	FASTJOGNEG	JogLeg	0.000	4.00	100.0	100.0
12	SLOWJOGNEG	JogLeg	0.000	1.00	100.0	100.0
13	Absolute	1.500	1.00	110.0	110.0	70.0
14	Absolute	2.500	2.00	120.0	120.0	90.0
15	Absolute	3.500	3.00	130.0	130.0	80.0
16	Absolute	4.500	4.00	140.0	140.0	70.0

ERD – Electric Rod-Style Actuator



SIZE: ALL

SPECIFICATIONS (US standard measurement)

ERD SIZE	SCREW DIA. in	MAXIMUM STROKE* in	SCREW CODE	LEAD in/rev	LEAD ACCURACY in/ft	BACKLASH in	MAXIMUM THRUST lbf	DYNAMIC LOAD RATING lbf	INERTIA		WEIGHT		WEIGHT (GD2 adder)		WEIGHT (SS2 adder)	
									Base	Per Inch	Base	Per Inch	Base	Per Inch	Base	Per Inch
									lb-in ²	lb-in ²	lb	lb	lb	lb	lb	lb
06	0.250	8	SN02	0.500	0.005	0.007	20	NA	0.0018	0.0001	0.263	0.035	0.579	0.027	-	-
			SN04	0.250												
			SN16	0.063												
10	0.375	10	SN01	1.000	0.007	0.007	40	NA	0.0022	0.0006	0.411	0.069	1.028	0.061	2.280	0.069
			SN02	0.500												
			SN05	0.200												
			0.472	BNM05	0.197	0.004	0.005	100	240	0.0040	0.0014	0.607	0.087	0.087		
15	0.500	12	SN01	1.000	0.006	0.007	75	NA	0.0104	0.0017	1.079	0.126	2.297	0.095	5.771	0.126
			SN02	0.500	0.005											
			SN05	0.200	0.006											
	0.630	24	BNM05	0.197	0.004	0.005	200	450	0.0178	0.0044	1.170	0.159	0.159			
			BNM10	0.394				400								
0.984	24	BNM05	0.197	0.004	0.005	500	900	0.0628	0.0263	7.575	0.325	6.455	0.256	-	-	
		BNM10	0.394													

SPECIFICATIONS (metric measurement)

ERD SIZE	SCREW DIA. mm	MAXIMUM STROKE* mm	SCREW CODE	LEAD mm/rev	LEAD ACCURACY mm/300mm	BACKLASH mm	MAXIMUM THRUST N	DYNAMIC LOAD RATING N	INERTIA		WEIGHT		WEIGHT (GD2 adder)		WEIGHT (SS2 adder)	
									Base	Per 25mm	Base	Per 25mm	Base	Per 25mm	Base	Per 25mm
									kg-m ² x 10 ⁻⁶	kg-m ² x 10 ⁻⁶	kg	kg	kg	kg	kg	kg
06	6.35	203.2	SN02	12.7	0.13	0.18	89	NA	0.53	0.03	0.119	0.016	0.263	0.012	-	-
			SN04	6.35												
			SN16	1.60												
10	9.53	254.0	SN01	25.4	0.18	0.18	188	NA	0.64	0.18	0.186	0.031	0.466	0.028	2.280	0.031
			SN02	12.7												
			SN05	5.08												
			12.00	BNM05	5.00	0.87	0.13	445	1068	1.16	0.41	0.275	0.039	0.039		
15	12.70	304.8	SN01	25.4	0.15	0.18	334	NA	3.04	0.50	0.489	0.057	1.042	0.043	5.771	0.057
			SN02	12.7	0.13											
			SN05	5.08	0.15											
	16.00	609.6	BNM05	5.00	0.87	0.13	890	2002	5.18	1.28	0.531	0.072	0.072			
			BNM10	10.00				1779								
20	25.00	609.6	BNM05	5.00	0.87	0.13	2224	4003	18.38	7.7	3.436	0.147	2.928	0.116	-	-
		BNM10	10.00													

Temperature range	40° to 130° F (4.4° to 54.4° C)
IP rating	40 (static)


*Longer stroke length modification available upon request.

SIDE LOAD CONSIDERATIONS

The standard ERD rod-style actuator is not meant to be used in applications where side loading occurs. If side loading exists in the application consider the GD2 guided option.

Loads must be guided and supported. Loads should be aligned with the line of motion of the thrust rod.

Side loading will affect the life of the actuator.



ERD – Electric Rod-Style Actuator

SIZE: **ALL**

MOTOR SPECIFICATIONS

Specifications	NEMA 11		NEMA 17		NEMA 23	
Motor Type	Bipolar Stepper, 1.8° per Step					
Encoder	Differential; 500 line (2000 count post quad)					
Resistance	3.5 Ω		2.4 Ω		1.5 Ω	
Inductance	2.3 mH		4.5 mH		3.7 mH	
Rated Current	1 Arms		1.5 Arms		2 Arms	
Maximum Torque	0.813 in-lbs	0.092 N-m	4.4 in-lbs	0.497 N-m	6.25 in-lbs	0.706 N-m
Maximum RPM	1500 RPM		900 RPM		1050 RPM	
Degree per Step	1.8°		1.8°		1.8°	
Rotor Inertia	0.006 lb-in ²	17.588 g-cm ²	0.028 lb-in ²	81.939 g-cm ²	0.075 lb-in ²	219.481 g-cm ²

ACS DRIVE/CONTROLLER SPECIFICATIONS

DRIVE POWER	
Current - Max	4A
Voltage Nominal	20 - 28V
Over Voltage	30V
Under Voltage	18V
Absolute Maximum Voltage	35V
Logic Current Draw (24V)	100 mA

OPERATING CONDITIONS	
Ambient Temperature	77°F, 25°C Nominal
Operating Temperature	32 - 104°F, 0 - 40°C
Storage Temperature	32-158°F, 0-70°C
Humidity	0 - 90% non-condensing

See ACS Hardware and Installation Guide #3604-4173 for more details.

What Does IP67 mean?

The IP Code (or International Protection Rating) consists of the letters IP followed by two digits and an optional letter. As defined in international standard IEC 60529, it classifies the degrees of protection provided against the intrusion of solid objects (including body parts like hands and fingers), dust, accidental contact, and water in electrical enclosures.

SOLIDS, FIRST DIGIT:		
4	>1 mm	Most wires, screws, etc.
6	Dust tight	No ingress of dust; complete protection against solid object intrusion
LIQUIDS, SECOND DIGIT (static rating)		
0	Not protected	
7	Immersion up to 1 m	Ingress of water in harmful quantity shall not be possible when the enclosure is immersed in water under defined conditions of pressure and time (up to 1 m of submersion).

The first digit indicates the level of protection that the enclosure provides against access to hazardous parts (e.g., electrical conductors, moving parts) and the ingress of solid foreign objects.


The second digit indicates the level of protection that the enclosure provides against harmful ingress of water.

ERD – Electric Rod-Style Actuator


SIZE: ALL

PERFORMANCE

ACME & BALL SCREW/NUT CRITICAL SPEED CAPACITIES

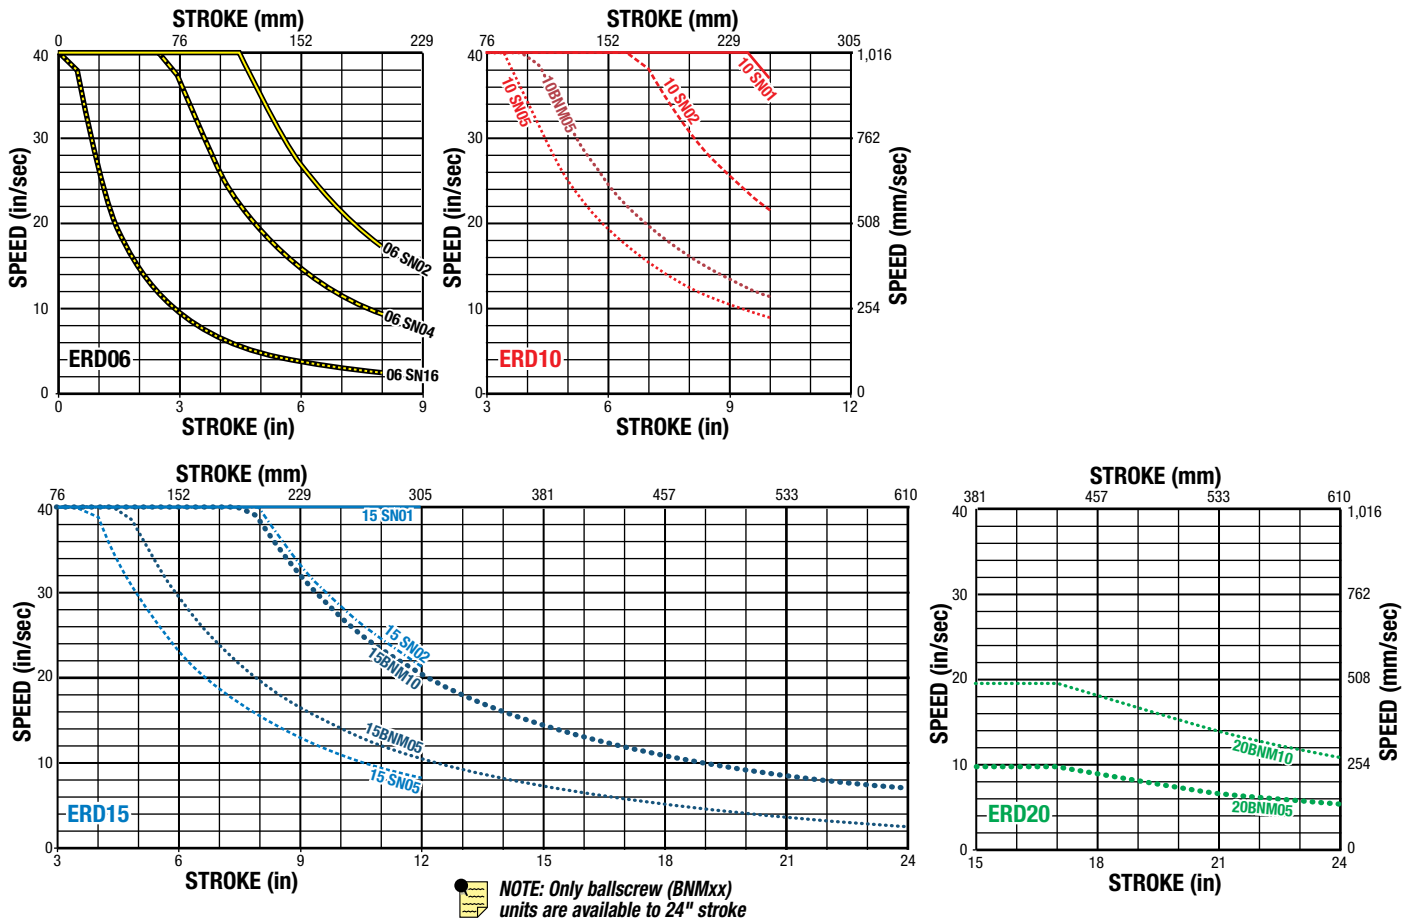

MAXIMUM THRUST vs STROKE

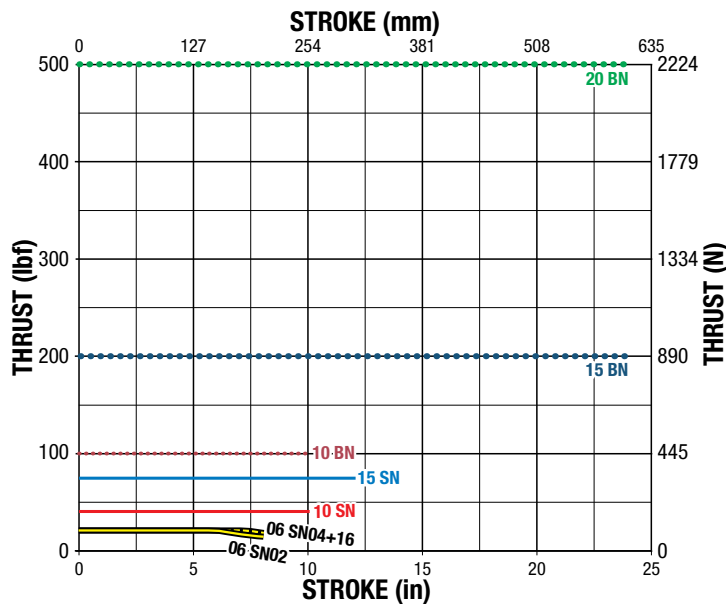


ERD – Electric Rod-Style Actuator



SIZE: ALL

PERFORMANCE

PV LIMITS (Pressure Velocity of Acme Nut)

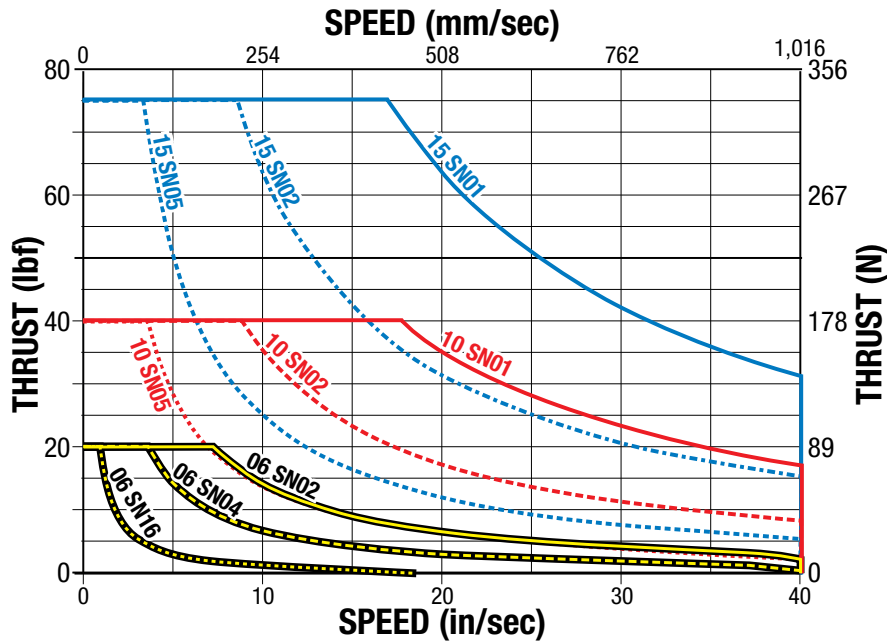


PV LIMITS: Any material which carries a sliding load is limited by heat buildup. The factors that affect heat generation rate in an application are the pressure on the nut in pounds per square inch and the surface velocity in feet per minute. The product of these factors provides a measure of the severity of an application.

$$P \times V \leq 0.1$$

$$\left(\frac{\text{Thrust}}{\text{(Max. Thrust Rating)}} \right) \times \left(\frac{\text{Speed}}{\text{(Max. Speed Rating)}} \right) \leq 0.1$$

BALL SCREW LIFE

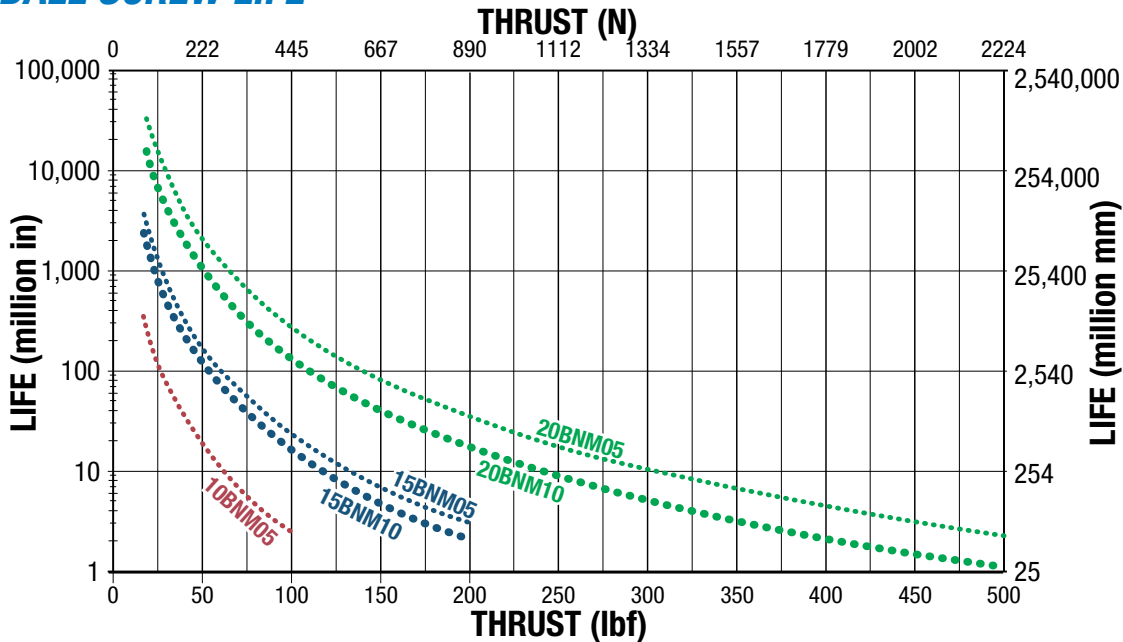

NOTE: The L_{10} expected life of a ball screw linear actuator is expressed as the linear travel distance that 90% of properly maintained ball screw manufactured are expected to meet or exceed. This is not a guarantee and this graph should be used for estimation purposes only.

The underlying formula that defines this value is:

$$L_{10} = \left(\frac{C}{F} \right)^3 \cdot \ell =$$

Travel life in millions of inches, where:
C = Dynamic load rating (lbf)
F = Equivalent load (lbf)
 ℓ = Screw lead (in/rev)

Use the "Equivalent Load" calculation below, when the load is not constant throughout the entire stroke. In cases where there is only minor variation in loading, use greatest load for life calculations.

$$P_e = \sqrt[3]{\frac{\%P_1^3 + \%P_2^3 + \%P_3^3 + \%P_n^3}{100}}$$

Where:
P_e = Equivalent load (lbs)
P_n = Each increment at different load (lbs)
%_n = Percentage of stroke at load increment




ERD – Electric Rod-Style Actuator

OPTION: **GD2 – GUIDED ERD**



PERFORMANCE



LOAD VS EXTENDED LENGTH

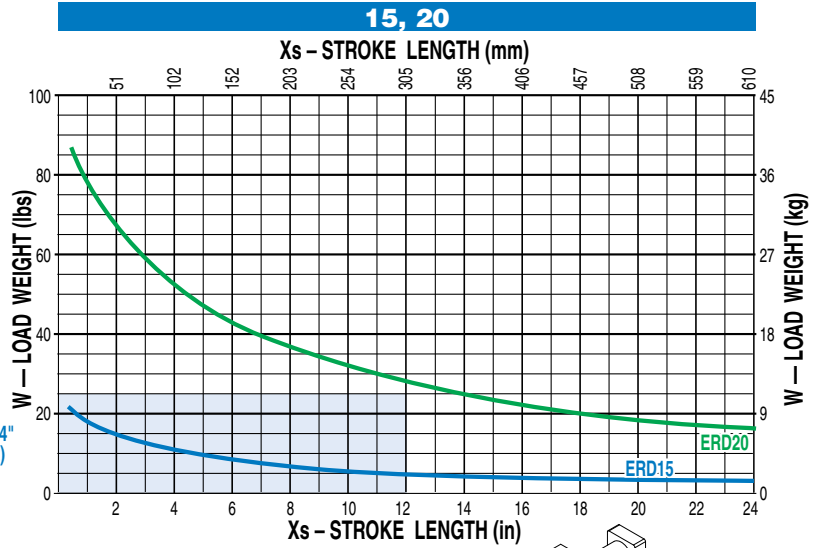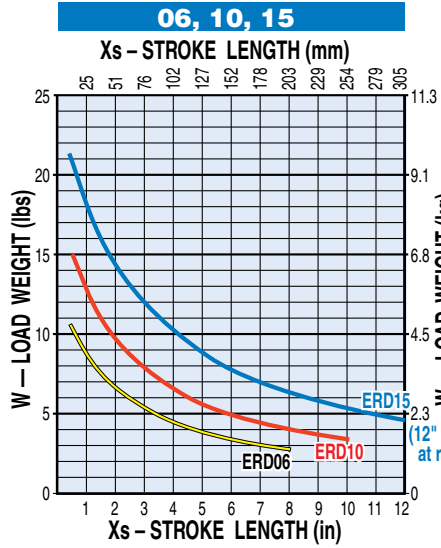





BENDING MOMENTS

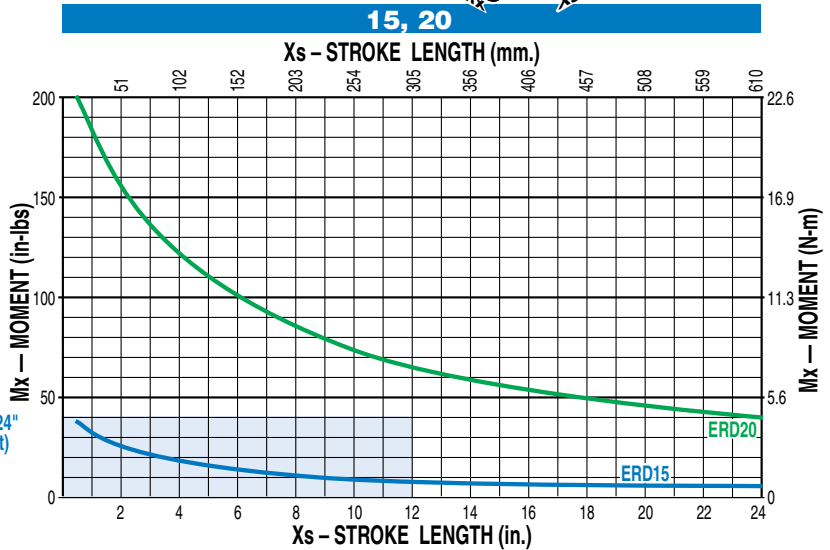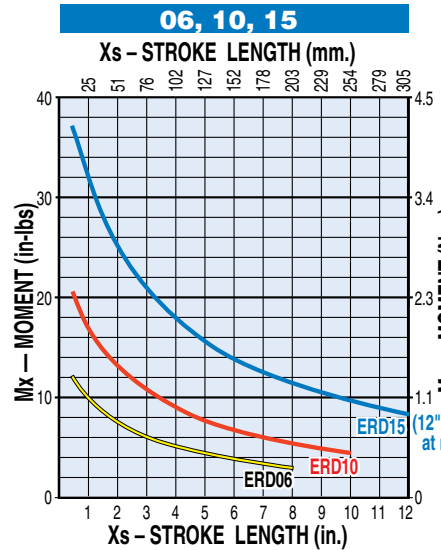

GUIDE ROD DEFLECTION



NOTE: Deflection is measured at the tooling plate. Excessive deflection may impact actuator life. Contact Tolomatic for assistance

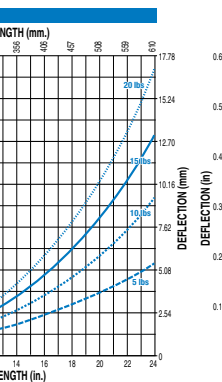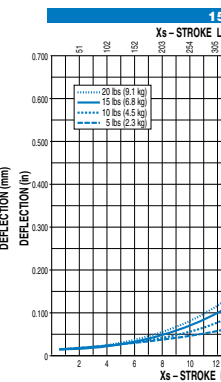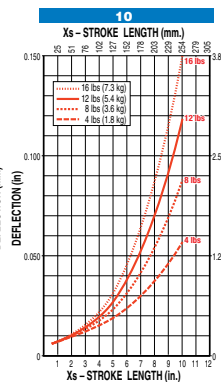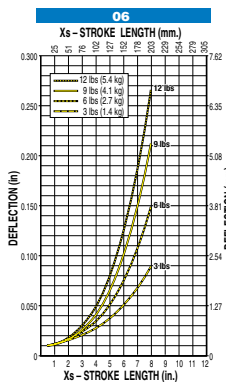


ERD – Electric Rod-Style Actuator





PERFORMANCE DATA WITH ACS DRIVE/CONTROLLER

SPEED vs THRUST - ERD06 ACTUATOR WITH NEMA11 MOTOR


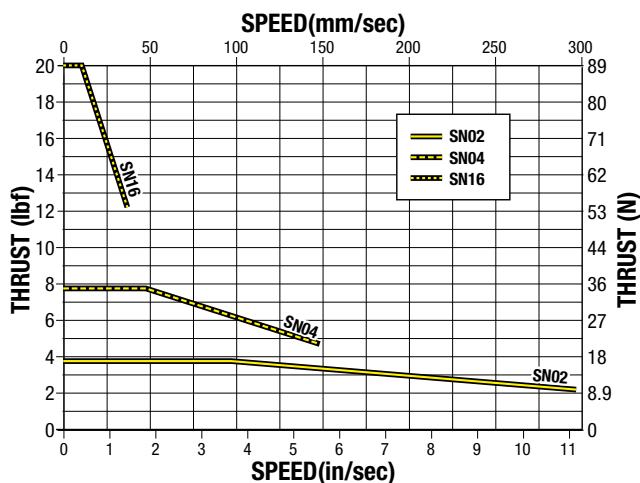


SS2 OPTION IS NOT AVAILABLE FOR THE 06 SIZE

SPEED vs THRUST - ERD10 ACTUATOR WITH NEMA17 MOTOR

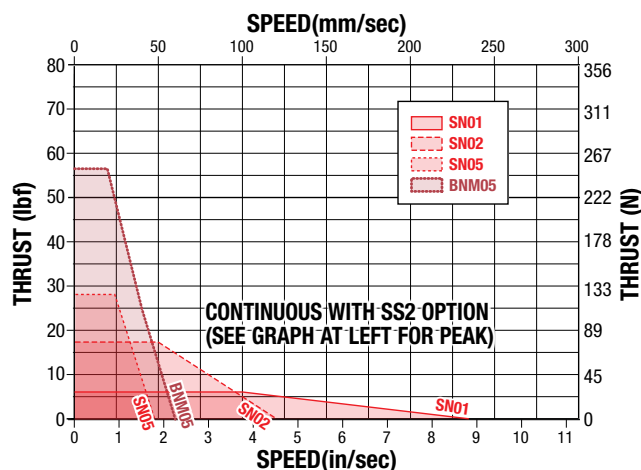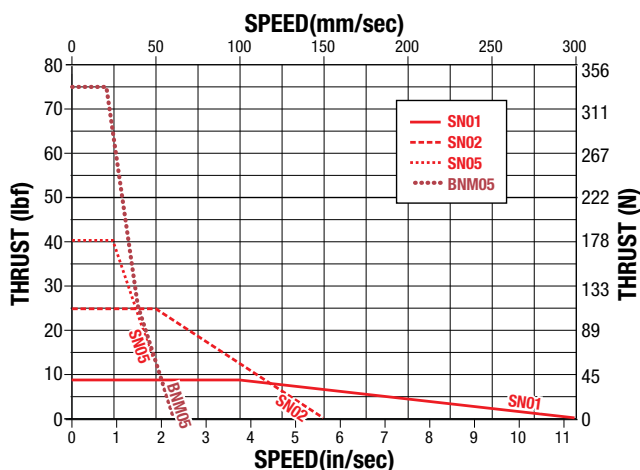


SPEED vs THRUST - ERD15 ACTUATOR WITH NEMA23 MOTOR

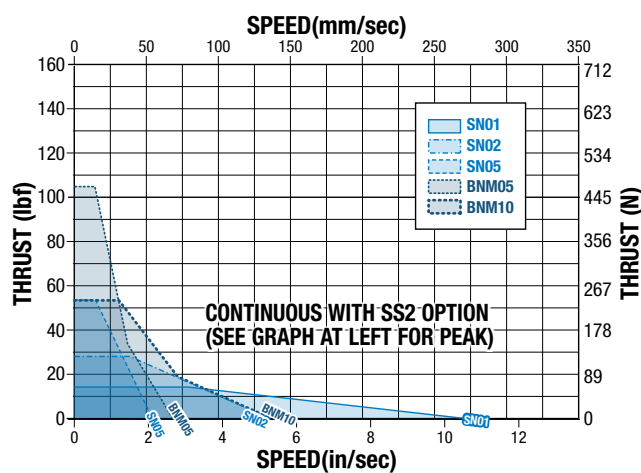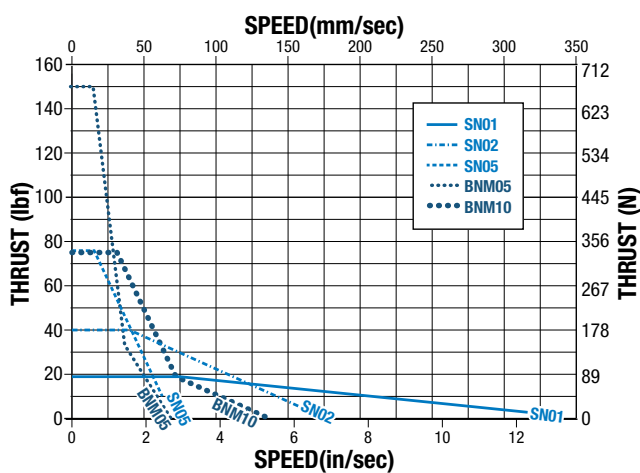


ERD – Electric Rod-Style Actuator

DIMENSIONS  3D CAD available at www.tolomatic.com

ACTUATOR

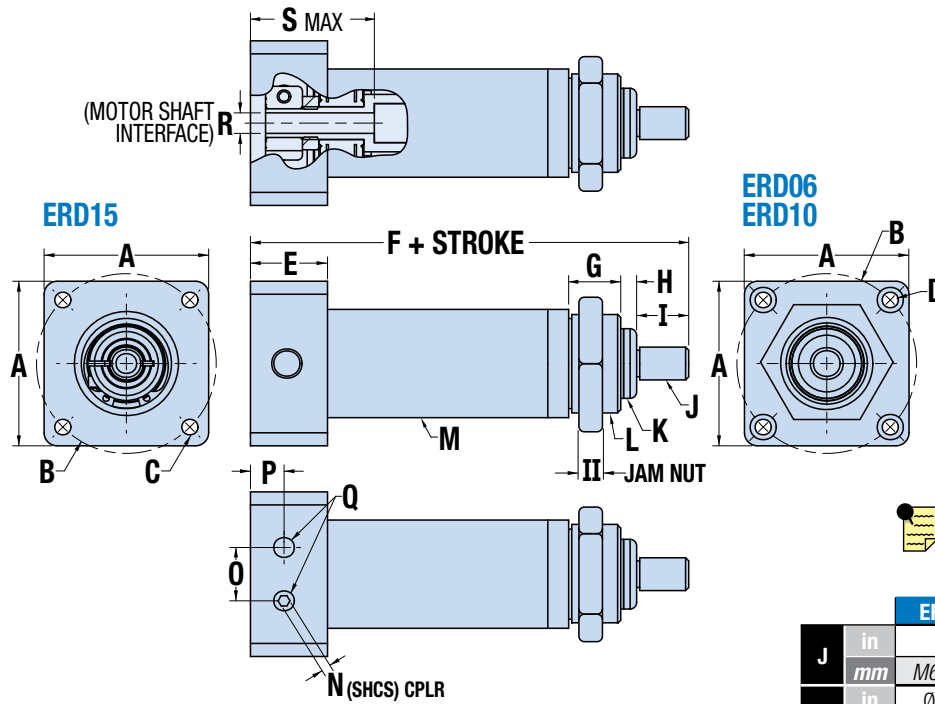


 *This dimension is determined by motor choice. See page 27 for details of Your Motor Here (YM) motor mounting

		ERD06	ERD10	ERD15	ERD20
A	in	1.125	1.580	2.220*	*
	mm	28.58	40.13	56.39*	*
B	in	Ø1.287	Ø1.725	Ø2.625*	*
	mm	Ø32.69	Ø43.82	Ø66.68*	*
C	in	-	-	-	*
	mm	-	-	M4 x 0.7*	*
D	in	0.136	0.154	-	*
	mm	Ø3.45	Ø3.91	-	*
E	in	1.400	0.740	0.850*	*
	mm	35.56	18.80	21.59*	*
F	in	3.88	4.20	5.40*	*
	mm	98.5	106.7	137.2*	*
G	in	0.500	0.500	0.600	0.750
	mm	12.70	12.70	15.24	18.75
H	in	0.153	0.153	0.153	0.153
	mm	3.89	3.89	3.89	3.89
I	in	0.375	0.500	0.750	0.750
	mm	9.53	12.70	19.05	19.05

		ERD06	ERD10	ERD15	ERD20
J	in	-	-	-	-
	mm	M6 x 1.0	M8 x 1.25	M12 x 1.75	M18 x 2.0
K	in	0.443	0.686	0.1.041	1.323
	mm	Ø11.25	Ø17.42	Ø26.40	33.60
L	in	-	-	-	-
	mm	M16 x 1.5	M24 x 1.5	M34 x 1.5	M44 x 1.5
II	in	0.236	0.236	0.315	0.315
	mm	6.00	6.00	8.00	8.00
M	in	0.686	0.1.040	0.1.638	0.2.051
	mm	Ø17.42	Ø26.42	Ø41.61	52.20
N	in	0.098	0.098	0.098*	*
	mm	2.50	2.50	2.50*	*
O	in	0.512	0.512	0.512	0.920
	mm	13.00	13.00	13.00	23.37
P	in	0.264	0.323	0.298*	*
	mm	6.71	8.20	7.57*	*
Q	in	(2) M4 x 0.7 ‡.10	(2) M6 x 1.0 ‡.31	(2) M6 x 1.0 ‡.50	(2) M6 x 1.0 ‡.50
	mm	(2) M4 x 0.7 ‡2.5	(2) M6 x 1.0 ‡7.9	(2) M6 x 1.0 ‡12.7	(2) M6 x 1.0 ‡12.7
R	in	Ø.197	Ø.197	Ø.250*	*
	mm	Ø5.00	Ø5.00	Ø6.35*	*
S	in	1.100	1.100	1.250*	*
	mm	27.94	27.94	31.75*	*

IP67 OPTION DIMENSIONS

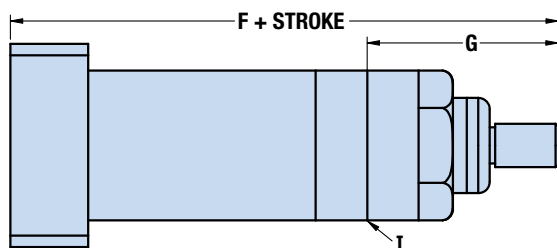

IP67 OPTION


		ERD06	ERD10	ERD15	ERD20
F	in	4.59	4.79	6.00*	*
	mm	116.6	121.8	152.1*	*
G	in	1.744	1.739	2.088	2.853
	mm	44.30	44.17	53.04	72.48
I	Surface for mounting options				

IP67 (static rating) option replaces the Jam Nut (II in table above)

ERD – Electric Rod-Style Actuator


DIMENSIONS  3D CAD available at www.tolomatic.com


FM2 - FOOT MOUNT

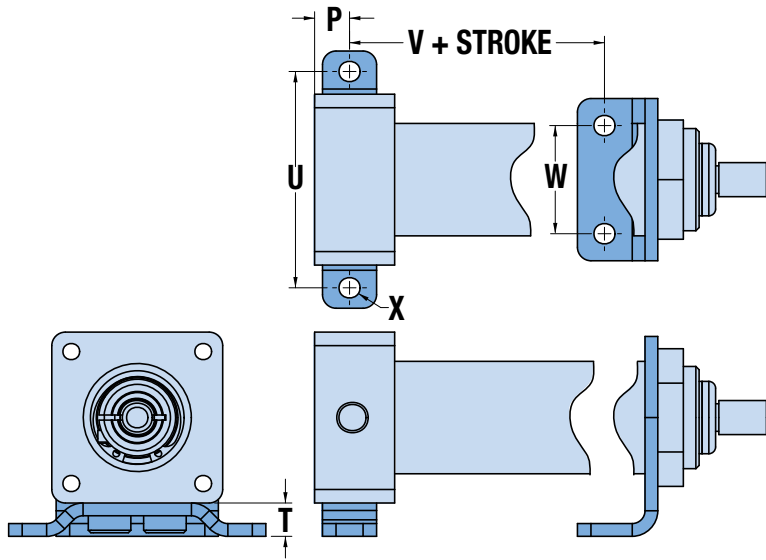


		ERD06	ERD10	ERD15	ERD20
P	in	0.264	0.323	0.298*	*
	mm	6.71	8.20	7.57*	*
T	in	0.259	0.308	0.406	0.569
	mm	6.58	7.82	10.31	14.46
U	in	1.750	2.00	2.600	3.250
	mm	44.45	50.80	66.04	82.55
V	in	2.270	2.357	3.165	3.200
	mm	57.66	59.87	80.39	81.28
W	in	0.625	1.00	1.250	1.25
	mm	15.88	25.4	31.75	31.75
X	in	0.154	0.194	0.221	0.281
	mm	0.391	0.493	0.561	0.714
Y	in	0.250	0.250	0.430	0.750
	mm	6.35	6.35	10.92	19.05
Z	in	0.1878 / 0.1876	0.2503 / 0.2501	0.3753 / 0.3751	0.6245 / 0.6240
	mm	0.4770 / 0.4765	0.6358 / 0.6353	0.9533 / 0.9528	0.15.862 / 0.15.850
AA	in	1.221	0.350	0.425*	*
	mm	31.01	8.89	10.80*	*
BB	in	1.750	2.250	2.500	3.500
	mm	44.45	57.15	63.50	88.90
CC	in	1.000	1.375	1.750	2.250
	mm	25.40	34.93	44.45	57.15
DD	in	0.500	0.875	1.250	1.750
	mm	12.70	22.23	31.75	44.45
EE	in	1.250	1.750	2.000	3.000
	mm	31.75	44.45	50.80	76.20
FF	in	0.154	0.194	0.221	0.281
	mm	0.391	0.493	0.561	0.714
GG	in	0.709	1.102	1.575	1.890
	mm	18.00	28.00	40.00	48.08
HH	in	0.194	0.194	0.194	0.194
	mm	4.93	4.93	4.93	4.93
II	in	0.236	0.236	0.315	0.315
	mm	6.00	6.00	8.00	8.00

TRR - TRUNNION MOUNT

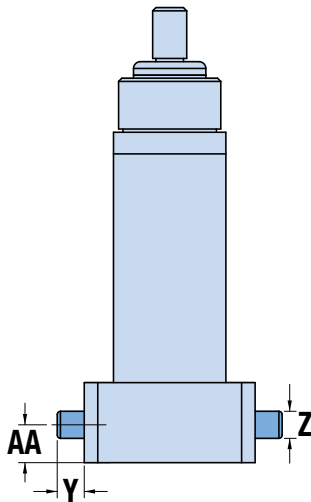

 *This dimension is determined by motor choice. See page 27 for details of Your Motor Here (YM) motor mounting.


FFG - FRONT FLANGE

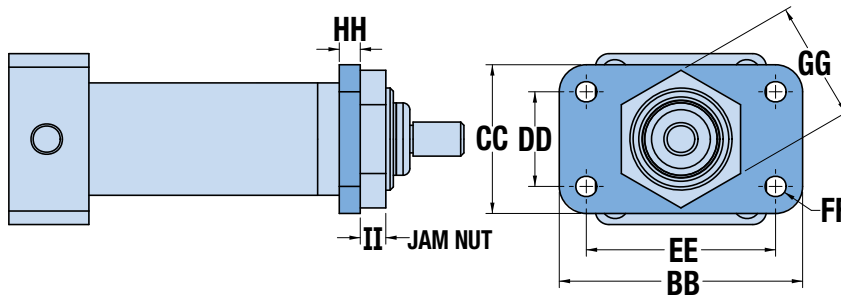


ERD – Electric Rod-Style Actuator

DIMENSIONS  3D CAD available at www.tolomatic.com

GD2 – GUIDED ERD

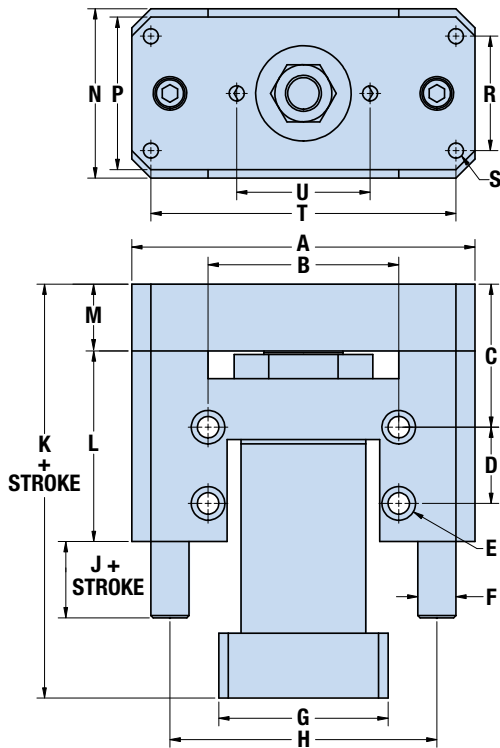


GUIDED ERD WITH IP67 OPTION
ERD STROKE IS REDUCED BY DIMENSION "V"

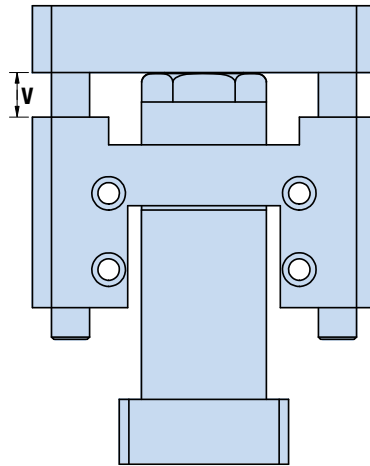


		ERD06	ERD10	ERD15	ERD20
A	in	3.000	3.500	4.500	5.900
	mm	76.20	88.90	114.30	149.86
B	in	1.625	2.000	2.500	3.250
	mm	41.28	50.80	63.50	82.55
C	in	1.125	1.250	1.875	2.500
	mm	28.58	31.75	47.63	63.50
D	in	1.000	1.000	1.000	2.00
	mm	25.40	25.40	25.40	50.8
E Ø	in	0.194	0.221	0.281	0.344
		⌊0.31 x 0.19⌋	⌊0.38 x 0.22⌋	⌊0.44 x 0.28⌋	⌊0.56 x 0.34⌋
	mm	4.93	5.61	7.14	8.74
		⌊7.9 x 4.8⌋	⌊9.7 x 5.6⌋	⌊11.2 x 7.1⌋	⌊13.5 x 8.6⌋
F Ø	in	0.250	0.375	0.500	0.750
	mm	6.35	9.53	12.70	19.05
G	in	1.125	1.580	2.220*	*
	mm	28.58	40.13	56.39*	*
H	in	2.250	2.750	3.500	4.625
	mm	57.15	69.85	88.90	117.48
J	in	1.000	1.000	1.000	1.500
	mm	25.40	25.40	25.40	38.10
K	in	3.910	4.244	5.428*	*
	mm	99.31	107.80	137.87*	*
L	in	2.000	2.000	2.500	5.000
	mm	50.80	50.80	63.50	127.00
M	in	0.500	0.625	0.875	1.000
	mm	12.70	15.88	22.23	25.40
N	in	1.125	1.580	2.220	2.400
	mm	28.58	40.13	56.39	60.96
P	in	1.000	1.500	2.000	2.300
	mm	25.40	38.10	50.80	58.42
R	in	0.625	1.000	1.500	1.500
	mm	15.88	25.40	38.10	38.10
S	in	–	–	–	–
	mm	M4x0.7	M5x0.8	M6x1.0	M8x1.25
T	in	2.625	3.000	4.000	5.000
	mm	66.68	76.20	101.60	127.00
U	in	1.000	1.375	1.750	2.250
	mm	25.40	34.93	44.45	57.15
V	in	0.716	0.587	0.585	1.200
	mm	18.19	14.91	14.86	30.47

SS2 – STAINLESS-STEEL BODY WITH PROTECTIVE MOTOR COVER AND IP67 UPGRADE

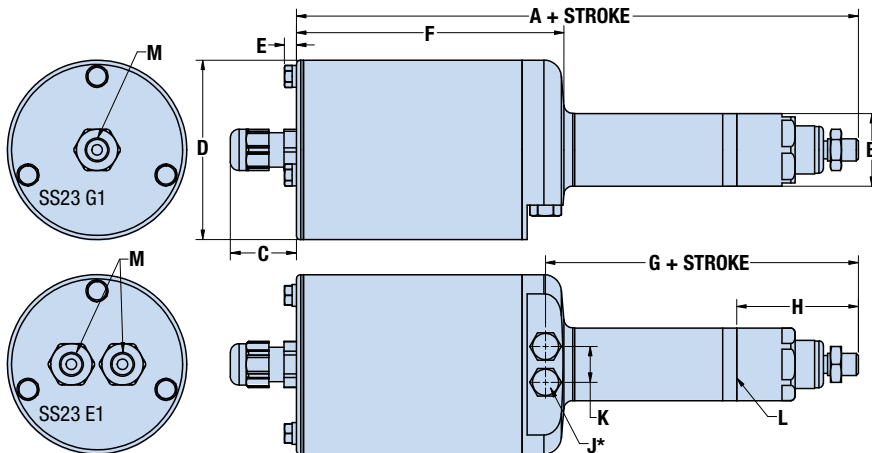

		ERD10	ERD15
A	in	8.03	9.33
	mm	204.0	237.0
B	in	1.040	1.638
	mm	26.42	41.61
C	in	0.945	0.945
	mm	24.00	24.00
D	in	2.563	3.543
	mm	65.10	89.99

		ERD10	ERD15
E	in	0.173	0.173
	mm	4.39	4.39
F	in	3.976	4.192
	mm	100.99	106.48
G	in	4.471	5.660
	mm	113.56	143.76
H	in	1.739	2.088
	mm	44.17	53.04
J*	in	–	–
	mm	M6 x 1.0	M6 x 1.0

 *This dimension is determined by motor choice. See page 27 for details of Your Motor Here (YM) motor mounting.

 SS2 is not available for the 06 & 20 size

		ERD10	ERD15
K	in	0.512	0.512
	mm	13.00	13.00
L	Surface for mounting options		


M	Encoder		Available cable exit options:
	Code	Code	
	SS21	G1,E1	
SS22	G1,E1	no cord grips M20 x 1.5 tapped hole	
SS23	G1	1 cord grip (motor, no encoder)	
	E1	2 cord grips (motor, with encoder)	

*Unit ships standard with hex bolts in these tapped holes
NOTE: IP67 is a static rating

ERD – Electric Rod-Style Actuator


TOLOMATIC MOTOR DIMENSIONS  3D CAD available at www.tolomatic.com

NEMA11 DIMENSIONS

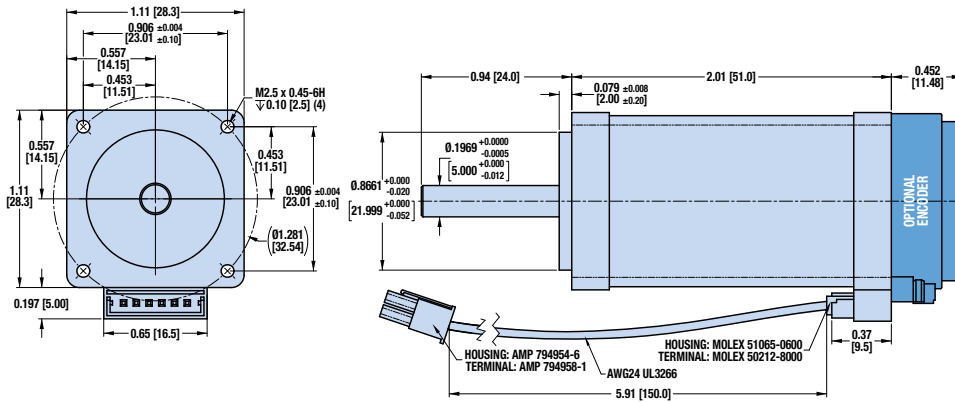


Code	Description
AMS1A1C1	NEMA11 motor no encoder
AMS1A1A1	NEMA11 motor with encoder

NEMA17 DIMENSIONS

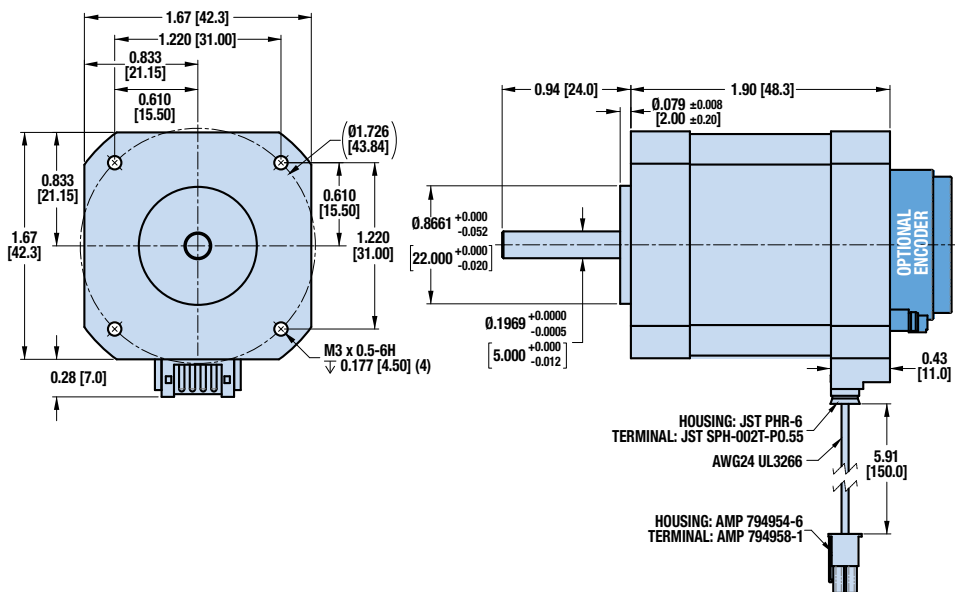

Code	Description
AMS1B1C1	NEMA17 motor no encoder
AMS1B1G1	NEMA17 motor with encoder
AMS1B1A1	NEMA17 motor with encoder
AMS1B1E1	NEMA17 motor with encoder

NEMA23 DIMENSIONS

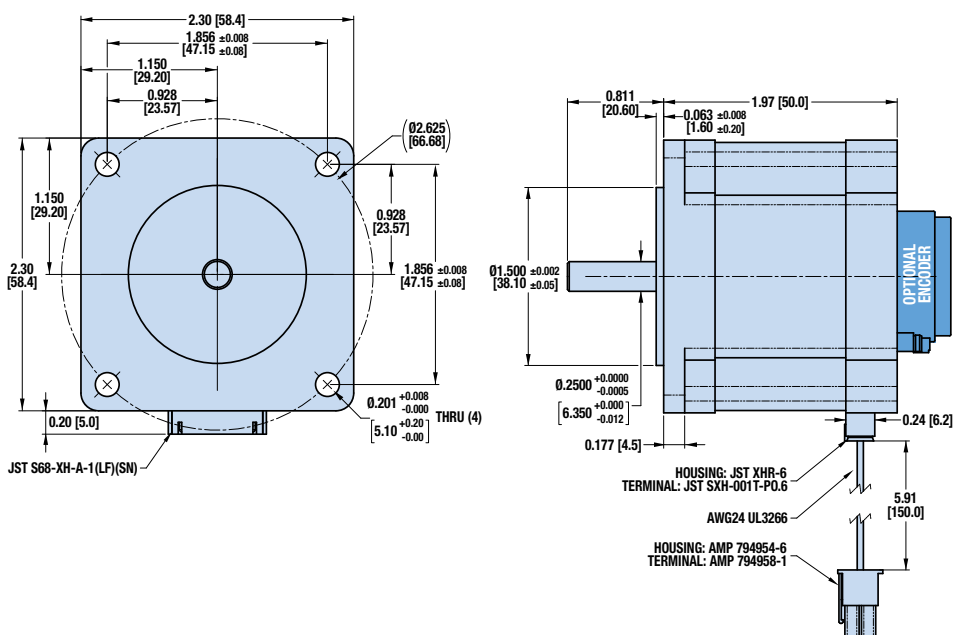

Code	Description
AMS1C1C1	NEMA23 motor, no encoder
AMS1C1G1	NEMA23 motor, no encoder
AMS1C1A1	NEMA23 motor, with encoder
AMS1C1E1	NEMA23 motor, with encoder


ERD – Electric Rod-Style Actuator

ALTERNATIVE MOTOR DIMENSIONS  3D CAD available at www.tolomatic.com


MOTOR DIMENSIONS – NEMA MOTOR MOUNT

The ERD actuator is designed to accommodate NEMA standard stepper and servo motors.


ACTUATOR	SIZE
ERD06	NEMA11
ERD10	NEMA17
ERD15	NEMA23

The only limiting factors are the motor shaft diameter and length. NEMA standard motors from the companies in the table at right have been found to be compatible with the ERD actuator.  *NOT a complete listing)

ERD Compatible NEMA Motor Suppliers*
Anaheim Automation
Animatics
Applied Motion Products
Automation Direct
Cool Muscle
Electrocraft
Fastech
IMS / Scheider Electric
JVL
LIN Engineering
Nippon Pulse Motor
Omega
Oriental Motor
Parker
Sanyo Denki
+ Others

 When any motor has been selected for use with the ERD actuator it is important to confirm the motor is compatible with the dimensions in the table below.


		ERD06	ERD10	ERD15	
MOTOR SHAFT	LENGTH	MIN. A in	0.50	0.50	0.50
		mm	12.7	12.7	12.7
	MAX. B in	1.100	1.100	1.250	
		mm	27.94	27.94	31.75
DIAMETER	B in	0.197	0.197	0.250	
	mm	5.00	5.00	6.35	
BOLT HOLE	CIRCLE C	in	1.287	1.725	2.625
		mm	33.69	43.82	66.68
	SPACING D	in	0.910	1.220	1.856
		mm	23.11	30.99	47.14
MOTOR PILOT	DIAMETER MAX. E	in	0.980	0.980	1.550
		mm	24.90	24.90	39.37
	HEIGHT MAX. F	in	0.090	0.130	0.130
		mm	2.29	3.30	3.30

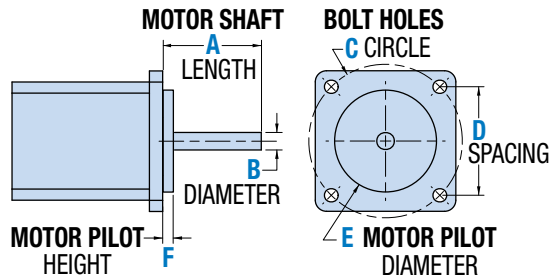


MOTOR DIMENSIONS – METRIC MOTOR MOUNT OPTION

The ERD actuator with metric motor mount option is designed to accommodate metric standard servo motors.


ACTUATOR	SIZE
ERD10	40mm
ERD15	60mm

Metric motors from the companies in the table to the right have been found to be compatible with the ERD actuator with the metric motor mount option.  *NOT a complete listing)

ERD Compatible Metric Motor Suppliers*
Allen Bradley
Bosch Rexroth
Emerson
Lenze
Mitsubishi
Omron
Panasonic
Yaskawa
+ Others

 When any motor has been selected for use with the ERD actuator it is important to confirm the motor is compatible with the dimensions in the table below.

		ERD10	ERD15			
MOTOR SHAFT	LENGTH A	in	0.98	1.18		
		mm	25.0	30.0		
	DIAMETER B	in	IEC1	IEC1	IEC2	IEC3
			Ø.31	Ø.43	Ø.47	Ø.55
mm		IEC1	IEC1	IEC2	IEC3	
		Ø8.0	Ø11.0	Ø12.0	Ø14.0	
BOLT HOLE	CIRCLE C	in	1.81	2.76		
		mm	46.0	70.0		
	SPACING D	in	1.28	1.95		
		mm	32.53	49.50		
MOTOR PILOT	DIAMETER E	in	1.18	1.97		
		mm	30.0	50.0		

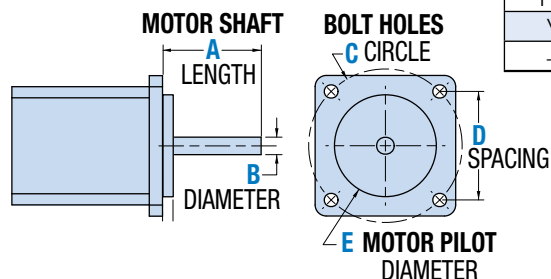


ACS – Actuator Control Solutions

DIMENSIONS  3D CAD available at www.tolomatic.com




ACS DRIVE/CONTROLLER (3604-9651) DIMENSIONS

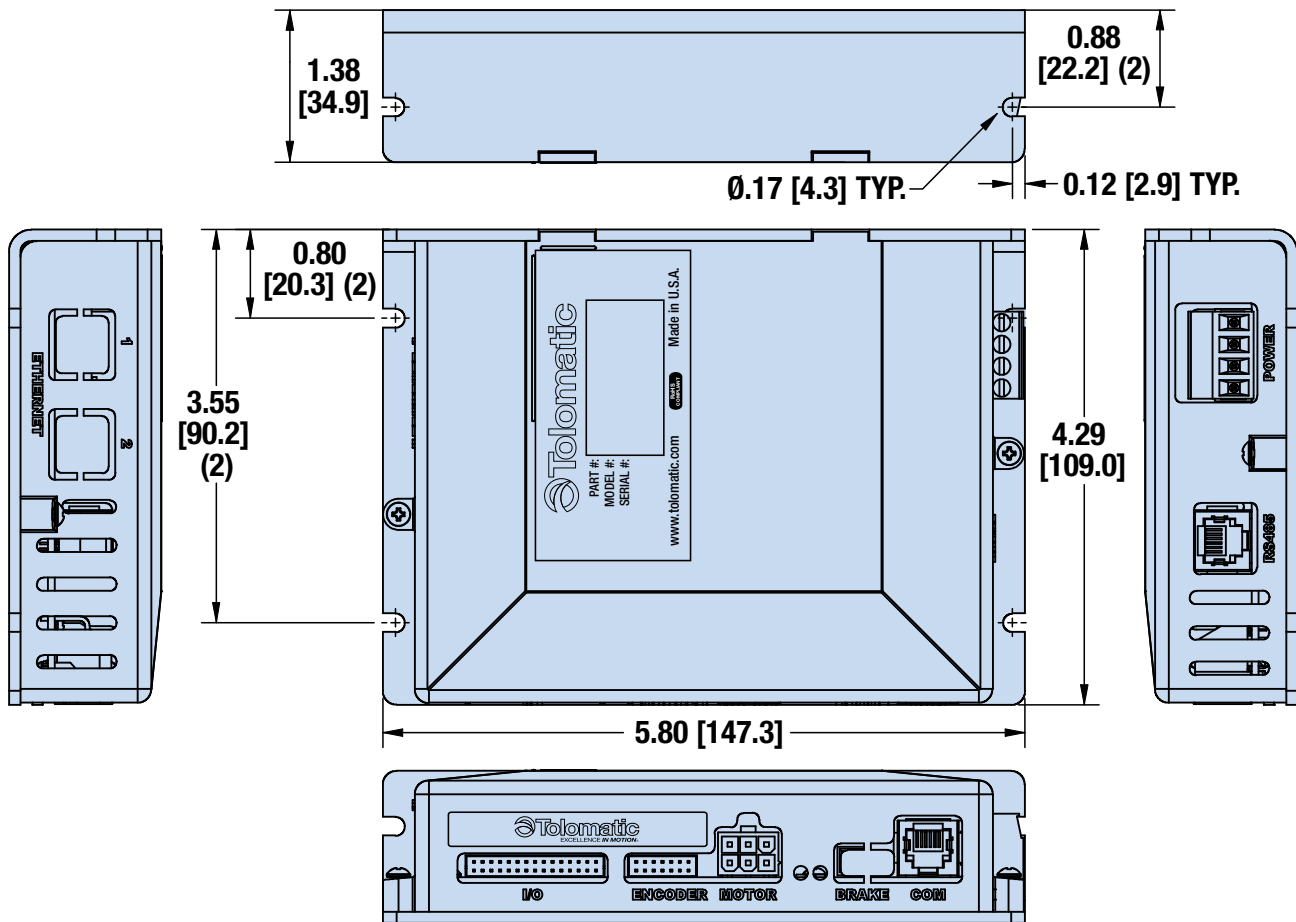

ERD – Electric Rod-Style Actuator

SIZE: ALL

SWITCHES

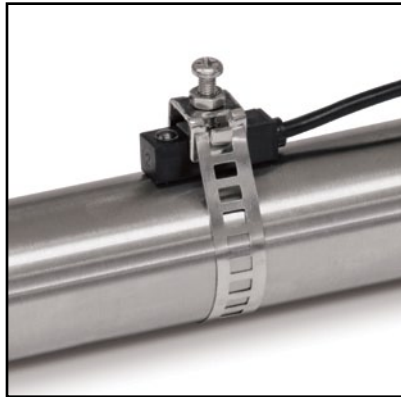

ERD actuators offer a wide range of sensing choices. There are 6 switch choices: reed, solid state PNP (sourcing) or solid state NPN (sinking); normally open; with flying leads or quick-disconnect.

Commonly used for end-of-stroke positioning, these switches allow clamp-on installation anywhere along the entire actuator length. The internal magnet, located on the thrust tube, is a standard feature. Switches can be installed in the field at any time.

Switches are used to send digital signals to PLC (programmable logic controller), TTL, CMOS circuit or other controller device. Switches contain reverse polarity protection. Solid state QD cables are shielded; shield should be terminated at flying lead end.

All switches are CE rated, IP67 rated and are RoHS compliant. Switches feature bright red or green LED signal indicators.



	Order Code	Part Number	Lead	Switching Logic	Power LED	Signal LED	Operating Voltage	**Power Rating (Watts)	Switching Current (mA max.)	Current Consumption	Voltage Drop	Leakage Current	Temp. Range	Shock / Vibration	IP Rating
REED	R Y	2190-9082	5m	SPST Normally Open	—	Red	5 - 240 AC/DC	**10.0	100mA	—	3.0 V max.	—	14 to 158°F	30 G / 9 G	67
	R K	2190-9083	QD*												
SOLID STATE	T Y	2190-9088	5m	PNP (Sourcing) Normally Open	—	Green	5 - 30 VDC	**3.0	200mA	8 mA @ 24V	1.0 V max.	0.01 mA max.	[-10 to 70°C]	50 G / 9 G	
	T K	2190-9089	QD*												
	K Y	2190-9090	5m	NPN (Sinking) Normally Open	—	Red									
	K K	2190-9091	QD*												

*QD = Quick-disconnect Enclosure classification IEC 529 IP67 (NEMA 6)

CABLES: Robotic grade, oil resistant polyurethane jacket, PVC insulation

⚠️ **WARNING: Do not exceed power rating (Watt = Voltage x Amperage). Permanent damage to sensor will occur.


SWITCH INSTALLATION - FIELD REPLACEMENT INSTRUCTIONS



STEP 1:
Loosen screw and nut.



STEP 2:
Place sensor and wrap the band around the ERD cylinder. Position the hook with the nearest hole on the band and mark the hole with a permanent marker.

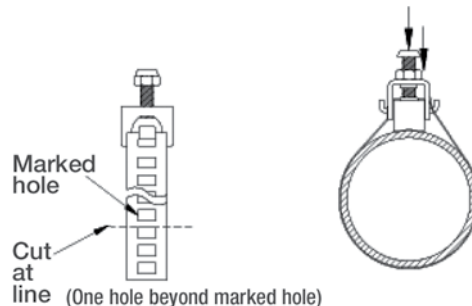

STEP 3:
Remove mounting assembly. Cut the band at the nearest edge of the next hole. (The one that's furthest away from the mounting head.)








STEP 4:
Replace the sensor and mounting assembly. Wrap the band and put the chosen hole on the hook. Position the switch and tighten. Tighten nut for steadying.

ERD – Electric Rod-Style Actuator

SIZE: **ALL**


SWITCHES

WIRING DIAGRAMS

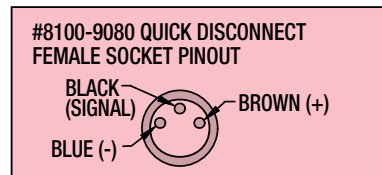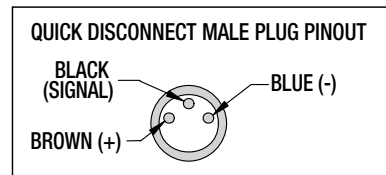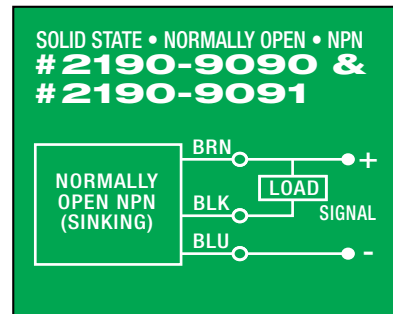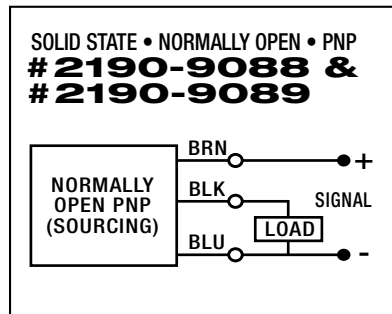
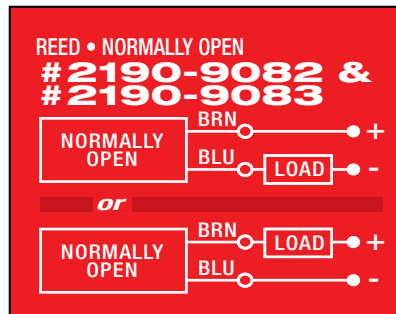


SWITCH DIMENSIONS


Y - direct connect

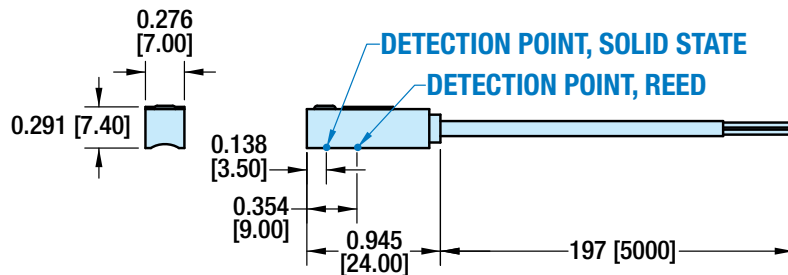

K - QD (Quick-disconnect) switch

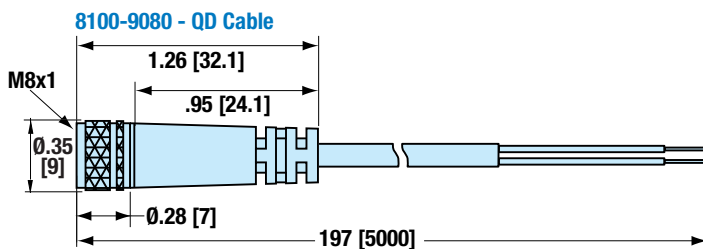




SWITCH CLAMP
 2190-1079



APPLICATION DATA WORKSHEET

Fill in known data. Not all information is required for all applications

ORIENTATION



Load supported by actuator OR Load supported by other mechanism

MOVE PROFILE

EXTEND

Move Distance _____

inch (US Standard) millimeters (Metric)

Move Time _____ sec

Max. Speed _____

in/sec mm/sec

Dwell Time After Move _____ sec

RETRACT

Move Distance _____

inch millimeters

Move Time _____ sec

Max. Speed _____

in/sec mm/sec

Dwell Time After Move _____ sec

NO. OF CYCLES

per minute per hour

HOLD POSITION?

Required

Not Required

After Move

During Power Loss

NOTE: If load or force changes during cycle use the highest numbers for calculations

EXTEND

LOAD

lb. (U.S. Standard) kg. (Metric)

FORCE

lb. (U.S. Standard) kg. (Metric)

RETRACT

LOAD

lb. (U.S. Standard) kg. (Metric)

FORCE

lb. (U.S. Standard) kg. (Metric)

STROKE LENGTH

inch (US Standard)

millimeters (Metric)

PRECISION

Repeatability _____

inch

millimeters

OPERATING ENVIRONMENT


Temperature, Contamination, Water, etc.

SIZING SOFTWARE

FREE - Windows® compatible software, download at www.tolomatic.com

Or Call 1-800-328-2174 for Excellent Customer Service & Technical Support

MOTION PROFILE

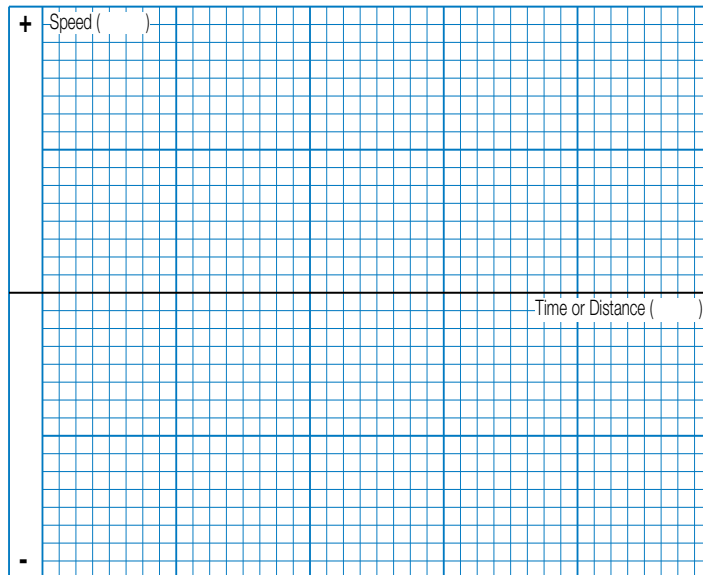

Graph your most demanding cycle, including accel/decel, velocity and dwell times. You may also want to indicate load variations and I/O changes during the cycle. Label axes with proper scale and units.

CONTACT INFORMATION

Name, Phone, Email
Co. Name, Etc.



USE THE TOLOMATIC SIZING AND SELECTION SOFTWARE AVAILABLE ON-LINE AT www.tolomatic.com OR... CALL TOLOMATIC AT 1-800-328-2174. We will provide any assistance needed to determine the proper actuator for the job.

FAX 1-763-478-8080

EMAIL help@tolomatic.com

ERD – Electric Rod-Style Actuator



Selection Guidelines

1 ESTABLISH MOTION PROFILE


Using the application stroke length, desired cycle time, loads and forces, establish the motion profile details including linear velocity and thrust in each of its segments.

2 SELECT ACTUATOR SIZE AND SCREW TYPE

Based on the required velocities and thrust select a size and screw type and lead of the ERD actuator.


3 VERIFY CRITICAL SPEED OF THE SCREW

Verify that the application's peak linear velocity does not exceed the critical speed value for the size and lead of the screw selected.

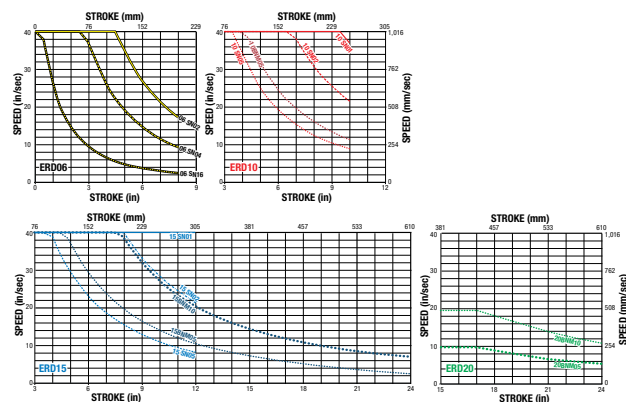

4 VERIFY AXIAL BUCKLING STRENGTH OF THE SCREW

Verify that the peak thrust does not exceed the critical buckling force for the size of the screw selected.

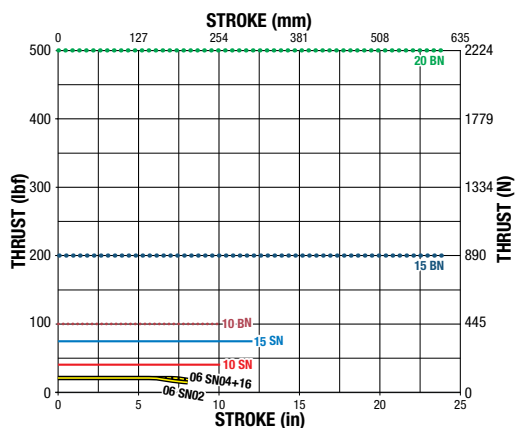


5 ESTABLISH TOTAL TORQUE REQUIREMENTS

Calculate total system inertia. The peak and RMS torque required from the motor to overcome internal friction, external forces and accelerate/decelerate the load.


6 VERIFY PV VALUE (IF ACME)

Verify that the PV value does not exceed the PV value for the size of the screw selected.

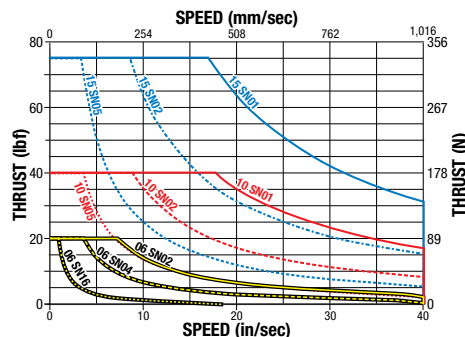

7 CALCULATE LIFE (IF BALL SCREW)

Determine the practical load of the system to calculate the L10 estimated life.

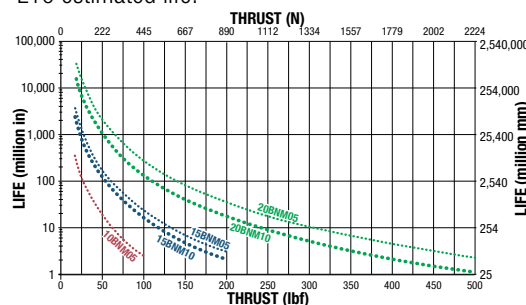

8 DETERMINE IF LOAD GUIDANCE IS NEEDED

If application requires carrying a load, anti-rotate, a tooling plate or there is risk of side loading the rod, choose the guided option. (GD2)

9 DETERMINE IF INGRESS PROTECTION AGAINST DUST AND WATER IS NEEDED.

If actuator is in contact with dust particulate, water or washdown environment choose the IP67 option. (IP67)

10 DETERMINE IF ENVIRONMENT IS CORROSIVE OR WASH DOWN

If corrosion resistance is required, choose from two options of stainless steel components

- (SS1) ERD with all stainless steel components
- (SS2) ERD with all stainless steel components and protective motor enclosure.

11 SELECT MOUNTING AND SENSOR CHOICES

Mounting options include: (TRN) trunnion mount, (FFG) front flange mount, (FM2) foot mount. 6 sensor choices include: reed, solid state PNP or NPN, all in normally open, with flying leads or quick-disconnect couplers.

12 SELECT ACTUATOR CONTROL SOLUTION

Add an extremely easy to use drive and motor combination to power the actuator.

ERD – Electric Rod-Style Actuator



SERVICE PARTS ORDERING

ERD ACTUATOR REPLACEMENT KITS


Code	Description	ERD SIZE			
		06	10	15	20
FFG	Front Flange Mount Kit	2190-1025	2191-1025	2192-1025	2193-1025
FM2	Foot Mount Kit	2190-9001	2191-9001	2192-9001	2193-9001
TRR	Trunnion Mount	1820-1003 (order 2)	0610-1044 (order 2)	6000-1785 (order 2)	2193-1018 (order 2)
IP67	*IP67 Kit	2190-9201	2191-9201	2192-9201	2193-9201

* REPLACEMENT ONLY: If used on an actuator that was not originally built with the IP67 option the thrust rod will retract below the Cap/Seal and may damage the seal

GD2	Guide Kit	Order via configurator code: GD2ERD__SM__.
-----	-----------	--

ERD SWITCHES

To order switch kits use configuration code for switch preceded by SW and actuator code.

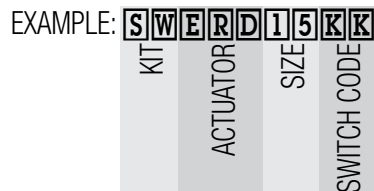

The example is for 3 Solid State NPN, Normally Open Switches with Quick-disconnect couplers. Each switch is complete with Bracket, Set Screw, Switch and mating QD cable.

Code	†Switch ONLY Part No.	Lead	Normally	Sensor Type
R Y	2190-9082	5m (197 in)	Open	Reed
R K	2190-9083††	Quick-disconnect		
T Y	2190-9088	5m (197 in)	Open	Solid State PNP
T K	2190-9089††	Quick-disconnect		
K Y	2190-9090	5m (197 in)	Open	Solid State NPN
K K	2190-9091††	Quick-disconnect		

†Also order clamp assembly #2190-1079

††Also order mating QD cable #8100-9080

To order switch ONLY see part number in table

ACS DRIVE/CONTROLLER, CABLES & MOTOR REPLACEMENT PARTS

Part No.	Description						
3604-9651	ACS Stepper Drive/Controller						
3604-9654	ACS Stepper Drive/Controller, EtherNet/IP (Analog Output)						
3604-9655	ACS Stepper Drive/Controller, Modbus TCP (Analog Output)						
3604-1766	Motor Power Cable (3 m)						
3604-1767	Motor Power Cable (5 m)						
3604-1768	Encoder Cable (3 meter length)						
3604-1769	Encoder Cable (5 meter length)						
3604-1770	I/O Cable (3 meter length)						
3604-1771	I/O Cable (5 meter length)						
2190-1304	Input Power Connector						
3604-9044	Starter Kit (includes RJ 12 cable; D-Sub to RJ converter; USB to RS232 Converter and Tolomatic Motion Interface CD) <table border="1" style="margin-left: 20px;"> <tr> <td>3604-9526</td> <td>Tolomatic Motion Interface CD</td> </tr> <tr> <td>3604-1795</td> <td>USB to RS232 Converter</td> </tr> <tr> <td>3604-9043</td> <td>RJ cable and D-Sub to RJ Converter Combo</td> </tr> </table>	3604-9526	Tolomatic Motion Interface CD	3604-1795	USB to RS232 Converter	3604-9043	RJ cable and D-Sub to RJ Converter Combo
3604-9526	Tolomatic Motion Interface CD						
3604-1795	USB to RS232 Converter						
3604-9043	RJ cable and D-Sub to RJ Converter Combo						

Code	Part No.	Description
AMS1A1C1	3604-1779	NEMA11 motor no encoder (ERD06)
AMS1A1A1	3604-1780	NEMA11 motor with encoder (ERD06)
AMS1B1C1 AMS1B1G1	3604-1775	NEMA17 motor no encoder (ERD10)
AMS1B1A1 AMS1B1E1	3604-1776	NEMA17 motor with encoder (ERD10)
AMS1C1C1 AMS1C1G1	3604-1777	NEMA23 motor, no encoder (ERD15)
AMS1C1A1 AMS1C1E1	3604-1778	NEMA23 motor, with encoder (ERD15)

ERD – Electric Rod-Style Actuator

ERD ORDERING

BASE MODEL

ERD 10 SN02 SM152-4 LMI SS2 IP67 FFG KK2 AM S1 B1 E1

MODEL	
ERD	Rod-Style Actuator

SIZE			
06	10	15	20

NUT/SCREW COMBINATIONS		
SIZE	CODE	TURNS/in (TPI)
06	SN	02, 04, 16
10	SN	01, 02, 05
10	BNM	05 mm lead
15	SN	01, 02, 05
15	BNM	05, 10 mm lead
20	BNM	05, 10 mm lead

STROKE LENGTH		
SM __	Enter desired stroke length in millimeters (25.4mm = 1 inch)	
MAXIMUM STROKE		
SIZE	ERD	
	mm	in
06	203.2	8
10	254.0	10
15	609.6	24
20	609.6	24

Contact Tolomatic with requests for longer strokes

MOTOR MOUNTING	
LMI	In-line motor mount

METRIC MOTOR MOUNT OPTION	
—	06 size (not available)
IEC1	10 size (40mm B.C., 7mm shaft dia.)
IEC1	15 size (60mm B.C., 11mm shaft dia.)
IEC2	15 size (60mm B.C., 12mm shaft dia.)
IEC3	15 size (60mm B.C., 14mm shaft dia.)

(see page ERD_20)

ACTUATOR GUIDE	
GD2	Guided unit with 2 guide shafts & tooling plate

ENVIRONMENTAL PROTECTION	
SS1	Stainless steel actuator
SS2_*	Stainless steel actuator with protective motor enclosure
SS21	NPT 1/2" conduit thread
SS22	M20x1.5 conduit thread
SS23	Cord grip(s), 1 or 2 grips determined by encoder choice
IP67	Ingress protection rating (static), dust protection, temporary immersion in water

- *NOTE: Only Tolomatic motors are available with the SS2 option. SS2 requires IP67 option
- *SS2 is not available for the 06 & 20 size
- IEC is not available in stainless steel
- GD2 is always aluminum even when ordered with SS1

ACTUATOR MOUNTING	
FFG**	Front Flange Mount
TRR	Trunnion Mounting, Rear
FM2**	Foot Mount

**NOTE: Foot Mount, Front Flange Mount and Switches are shipped together with the actuator but are not installed by Tolomatic.

MOTOR ORDERING

SWITCHES**						
TYPE	LOGIC	NORMALLY	QUICK-DISCONNECT	CODE	QUANTITY	LEAD LENGTH
REED	SPST	Open	No	RY	After code enter quantity desired	5 m (16.4 feet) 6 in (152mm) to QD connector w/ 5m lead
			Yes	RK		
SOLID STATE	PNP	Open	No	TY		
			Yes	TK		
SOLID STATE	NPN	Open	No	KY		
			Yes	KK		

**NOTE: Foot Mount, Front Flange Mount and Switches are shipped together with the actuator but are not installed by Tolomatic.

MOTOR ORDER CODE	
AM	Tolomatic Motor

NOTE: Your Motor Here (YM) is available on ERD15 & ERD20 sizes for non-Tolomatic motors

MOTOR TYPE	
S1	Stepper Motor

FRAME SIZE	
A1	11 Frame Motor (ERD06)
B1	17 Frame Motor (ERD10)
C1	23 Frame Motor (ERD15)

NOTE: Each ERD size has only one motor size choice

MOTOR OPTIONS	
A1	Encoder
C1	No Encoder
E1	Encoder with SS2 option
G1	No Encoder SS2 option

ACS DRIVE/CONTROLLER & CABLES ORDERING

Item No.	Part No.	Description
1.	3604-9651	ACS Stepper Drive/Controller (Model ST0324SD)
	3604-9654	ACS Stepper Drive/Controller, EtherNet/IP (Analog Output)
	3604-9655	ACS Stepper Drive/Controller, Modbus TCP (Analog Output)
2.	3604-1766	Motor Power Cable (3 m)
	3604-1767	Motor Power Cable (5 m)
3.	3604-1768	Encoder Cable (3 meter length)
	3604-1769	Encoder Cable (5 meter length)
4.	3604-1770	I/O Cable (3 meter length)
	3604-1771	I/O Cable (5 meter length)
5.	3604-9044	Starter Kit (includes RJ 12 cable; D-Sub to RJ converter; USB to RS232 Converter and Tolomatic Motion Interface CD)

NOTE: All 5 items from table at left are recommended for complete ACS system. Order items 1-5 by part numbers



Not all codes listed are compatible with all options. Contact Tolomatic with any questions.

THE TOLOMATIC DIFFERENCE What you expect from the industry leader:




EXCELLENT CUSTOMER SERVICE & TECHNICAL SUPPORT

Our people make the difference! Expect prompt, courteous replies to all of your application and product questions.



INDUSTRY LEADING DELIVERIES

Standard catalog products are built to order and ready-to-ship in 5 days or less. Modified and custom products ship weeks ahead of the competition.



INNOVATIVE PRODUCTS

From standard catalog products... to modified products... to completely unique custom products, Tolomatic designs and builds the best solutions for your challenging applications.



SIZING & SELECTION SOFTWARE

Windows® compatible, downloadable from our website – FREE – the best tool of its kind on the market! Product selection has never been easier.




3D MODELS & 2D DRAWINGS AVAILABLE ON THE WEB

Easy to access CAD files are available in many popular formats.

ALSO CONSIDER THESE OTHER TOLOMATIC PRODUCTS:

PNEUMATIC PRODUCTS

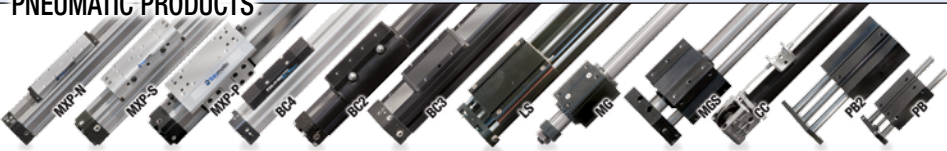

RODLESS CYLINDERS: Band Cylinders, Cable Cylinders, MAGNETICALLY COUPLED CYLINDERS/SLIDES; GUIDED ROD CYLINDER SLIDES

"FOLDOUT" BROCHURE #9900-9075
PRODUCTS BROCHURE #9900-4028

ELECTRIC PRODUCTS



ROD & GUIDED ROD STYLE ACTUATORS, HIGH THRUST ACTUATORS, SCREW & BELT DRIVE RODLESS ACTUATORS, MOTORS, DRIVES AND CONTROLLERS

"FOLDOUT" BROCHURE #9900-9074
PRODUCTS BROCHURE #9900-4016

POWER TRANSMISSION PRODUCTS



GEARBOXES: Float-A-Shaft®, Slide-Rite®; DISC CONE CLUTCH; CALIPER DISC BRAKES

"FOLDOUT" BROCHURE #9900-9076
PRODUCTS BROCHURE #9900-4029



3800 County Road 116 • Hamel, MN 55340 U.S.A.
Phone: (763) 478-8000 • Fax: (763) 478-8080

Toll-Free: **1-800-328-2174**

Email: help@tolomatic.com • <http://www.tolomatic.com>

All brand and product names are trademarks or registered trademarks of their respective owners. Information in this document is believed accurate at time of printing. However, Tolomatic assumes no responsibility for its use or for any errors that may appear in this document. Tolomatic reserves the right to change the design or operation of the equipment described herein and any associated motion products without notice. Information in this document is subject to change without notice.

Visit www.tolomatic.com for the most up-to-date technical information

